

|   |  |                   |        |
|---|--|-------------------|--------|
| <b>REFRIGERATOR MANUFACTURER</b><br><br><b>Turbo air</b><br>more durable, efficient, beautiful | 4184 E. Conant St.<br>Long Beach, CA 90808<br>Tel. 310-900-1000<br>Fax. 310-900-1077<br><a href="http://www.turboairinc.com">www.turboairinc.com</a> | Project:          |        |
|   |  | Model #:          |        |
|   |  | Item #:           |        |
|   |  | Available W/H:    | Qty:   |
|   |  | Approval:         |        |
|   |  | AIA #:            | SIS #: |
|   |  | CSI Section 11400 |        |

**Sandwich / Salad Unit** *Food Prep Tables  
E-line*

**Model : EST-60-N-V**



**FEATURES & BENEFITS**


- Hydrocarbon refrigerants (R-290)**  
 With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).
- Cold air compartment**  
 Our innovative "Cold Air Compartment" maintains temperature evenly for each pan to preserve fresh food longer. In addition, the compartment isolates pans from the reach-in area to prevent food spillage.
- Cabinet construction**  
 E-line model boasts a stainless steel exterior (door) with AL exterior sides (galvanized steel back and bottom). Interior is stainless steel floor and back with AL sides. It guarantees the utmost in cleanliness and long product life.
- High-density polyurethane insulation**  
 The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.
- Convenient cutting board side rail**
- Self-contained system**
- Standard 4" dia. swivel casters with locks on the front set**
- Standard 1/6 size, 4" deep condiment pans included**
- 9-1/2" deep, 1/2" thick cutting board included**
- Adjustable, heavy duty, PE (polyethylene) coated wire shelves**
- Refrigerator holds 33°F ~ 39°F for the best in food preservation**



| Model             | Swing Doors | CU./FT.   | #of Shelves | #of Pans  | #of Hood | HP         | AMPS       | Crated Weight (lbs.) | L x D x H† (inches)     |
|-------------------|-------------|-----------|-------------|-----------|----------|------------|------------|----------------------|-------------------------|
| <b>EST-60-N-V</b> | <b>2</b>    | <b>16</b> | <b>2</b>    | <b>16</b> | <b>1</b> | <b>2/5</b> | <b>4.1</b> | <b>237</b>           | <b>60 1/4 x 30 x 37</b> |

Ver.20210208 Printed in U.S.A. \* Depth does not include 1" for rear spacers. † Height does not include 5-5/8" for caster height.

## Model : EST-60-N-V

| ELECTRICAL DATA            |  |
|----------------------------|--|
| Voltage                    | 115/60/1   |
| Plug Type                  |  NEMA 5-15P |
| Full Load Amperes          | 4.1  |
| Compressor HP              | 2/5  |
| Cord Length (ft.)          | 9  |
| Refrigerant                | R-290  |
| DIMENSIONAL DATA           |  |
| Net Capacity (cu. ft.)     | 16   |
| Ext. Length Overall (in.)  | 60 1/4 (1530mm)  |
| Ext. Depth Overall (in.)*  | 30 (762mm)   |
| Ext. Height Overall (in.)† | 37 (939mm)   |
| # of Doors                 | 2  |
| # of Shelves               | 2  |
| # of Pans                  | 16   |
| Shelf Size (L x D) (in.)   | 27 x 17  |
| Gross Weight (lbs.)        | 237  |

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

\* Depth does not include 1" for rear spacers.

† Height does not include 5-5/8" for caster height.

■ **WARRANTY : 2 Year Parts and Labor Warranty  
Additional 3 Year Warranty on Compressor**

■ **STANDARD FEATURES**


- *Self-contained system*
- *Standard 4" dia. swivel casters with locks on the front set*
- *Standard 1/6 size, 4" deep condiment pans included*

■ **OPTIONAL ACCESSORIES**


- 1" caster, 1/2" diameter & 13 TPI: S28R813660 (non-brake)
- 2.5" caster, 1/2" diameter & 13 TPI: 30265H0100 (non-brake), 30265H0200 (w/ brake)
- 5" caster, 1/2" diameter & 13 TPI: M726500100 (non-brake), M726500200 (w/ brake)
- Leveling leg, 1/2" - 13 TPI x 1.54": LFM1213566
- 6" ABS plastic leg: 30221M0200
- 6" stainless steel leg: 30221M0600
- Removable food cover: RCT-60
- Single overshef, stainless steel, 60-3/8" W: TSOS-5S
- Double overshef, 18/304 stainless steel, 60-1/4" W: TSOS-5R
- Additional PE coated wire shelf: WM67800100
- Clear Lid: CL-60

## PLAN VIEW

(unit : inch)

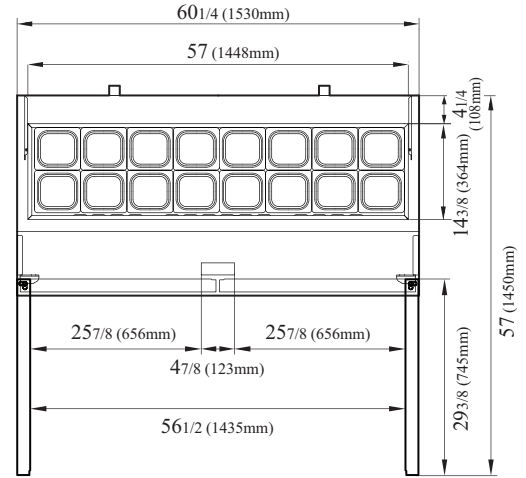

TOP VIEW

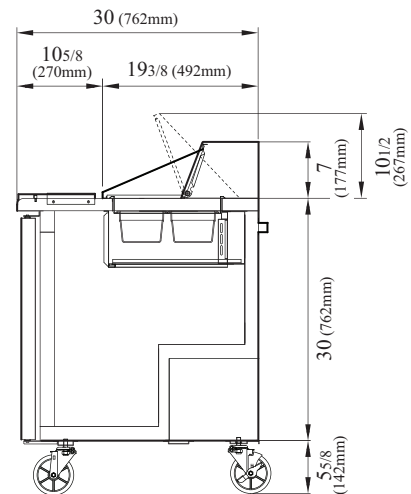

SIDE VIEW

Ver.20210208



- Turbo Air : 800-627-0032
- GK : 800-500-3519
- Warranty : 800-381-7770
- AC : 888-900-1002

REFRIGERATOR MANUFACTURER  
**Turbo air**

GERMAN  
KNIFE

RADIANCE

REFRIGERATION SYSTEM  
**Turbo air**

**Texaking**