

Long Beach, CA 90808 Tel. 310-900-1000 Fax. 310-900-1077 www.turboairinc.com

| Project: | | |
|-------------------|--------|------|
| Model #: | | |
| Item #: | | |
| Available W/H: | | Qty: |
| Approval: | | |
| AIA #: | SIS #: | |
| CSI Section 11400 | | |

h

| J | Inde | erco | unte | er R | efr | i 0(| erat | or - | Shalle | ow Depa |
|---|------|------|------|------|-----|-------------|------|------|--------|---------|
| | IIGC | | | | | 3 | | | Shanc | |

M3 Series

Undercounters

Model: MUR-34S-N6



____ FEATURES & BENEFITS ____

Digital temperature control & monitor system Keeps food products safe by maintaining constant temperatures. External digital display allows for easy monitoring.

 Hydrocarbon refrigerants (R-600a)
With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

Stainless steel exterior

The Turbo Air M3 model boasts a stainless steel exterior (galvanized steel back and bottom). Interior is stainless steel floor with AL sides and back. It guarantees the utmost in cleanliness and long product life. The M3 model adds a touch of style to the most refined setting.

High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

Ergonomically designed doors

Customers' fatigue fades away with easy grip handles and doors that open effortlessly. These features along with self-closing doors make this the ultimate choice in customer convenience. ABS sheet door liners resist water condensation with thermal efficiency.

LED interior lighting & fan control

Energy efficient LED lighting lights every corner, making items easy to find. Fan control function automatically shuts off the fan when the door is open, which prevents hot air from being drawn in, thus maintaining the cool inner temperature.

- Adjustable, heavy duty, PE (polyethylene) coated wire shelves
- Refrigerator holds 33°F ~ 38°F for the best in food preservation

| | | | | | NATU Refrig | erant 🛸 🗕 | tertek Intertek |
|------------|----------------|---------|----------------|-----|----------------|-------------------------|-----------------------------|
| Model | Swing Doors | CU./FT. | #of Shelves | HP | AMPS | Crated Weight (lbs.) | $L \ge D^* \ge H^{\dagger}$ |
| MUR-34S-N6 | 2 | 4.27 | 2 | 1/5 | 2.6 | 161 | 34 x 221/2 x 255/8 |

Ver.20231011 Printed in U.S.A.

*Depth does not include 3/4" for rear spacers. † Height does not include 5" for caster height.

Undercounter Refrigerator - Shallow Depth

Undercounters M3 Series

Model: MUR-34S-N6

| ELECTRICAL DATA | | | | |
|--|----------------|--|--|--|
| Voltage | 115/60/1 | | | |
| Plug Type | (i) NEMA 5-15P | | | |
| Full Load Amperes | 2.6 | | | |
| Compressor HP | 1/5 | | | |
| Cord Length (ft.) | 9 | | | |
| Refrigerant | R-600a | | | |
| DIMENSIONAL DATA | | | | |
| Net Capacity (cu. ft.) | 4.27 | | | |
| Ext. Length Overall (in.) | 34 (864mm) | | | |
| Ext. Depth Overall (in.)* | 221/2 (570mm) | | | |
| Ext. Height Overall (in.) [†] | 255/8 (650mm) | | | |
| # of Doors | 2 | | | |
| # of Shelves | 2 | | | |
| Shelf Size (L x D) (in.) | 141/4 x 111/8 | | | |
| Net Weight (lbs.) | 150 | | | |
| Gross Weight (lbs.) | 161 | | | |

Design and specifications subject to change without notice. Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 3/4" for rear spacers.

† Height does not include 5" for caster height.


5 Year Parts and Labor Warranty WARRANTY : 7 Year Compressor Warranty

STANDARD FEATURES


- Anti-corrosion coated evaporator
- Self-contained system
- 4" dia. swivel casters with locks on the front set
- ** Lead time applies. Please contact your sales representative for more details to order.

OPTIONAL ACCESSORIES

- 2.5" caster, 1/2" diameter & 13 TPI: 30265H0100 (non-brake), 30265H0200 (w/ brake)
- 5" caster, 1/2" diameter & 13 TPI: M726500100 (non-brake), M726500200 (w/ brake)
- 6" ABS plastic leg: 30221M0200
- 6" stainless steel leg: 30221M0600

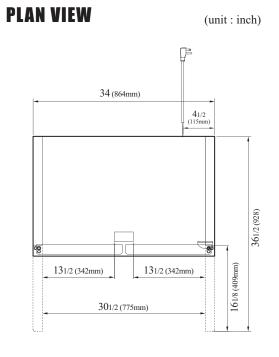

TOP VIEW



SIDE VIEW

Ver.20231011



(GERMAN

- **Turbo Air** : 800-627-0032 **GK** : 800-500-3519
- Warranty : 800-381-7770 AC : 888-900-1002



Texaking Turbo air KNIFE) Continued product development may necessitate specification changes without notice.