

Long Beach, CA 90808 Tel. 310-900-1000 Fax. 310-900-1077 www.turboairinc.com

Project:		
Model #:		
Item #:		
Available W/H:		Qty:
Approval:		
AIA #:	SIS #:	
CSI Section 11400		

Solid Door Heated Cabinet

PRO Series Model : PRO-50H

Reach-In

____ FEATURES & BENEFITS =___

Digital temperature control & monitor system

- Keeps food products safe by maintaining constant temperatures · Alarm beeps when doors are not sealed
- · Early warning alarm program detects issues before malfunction occurs
- · Digital display allows for easy monitoring
- · Sensitive touch display
- Ducted fan air distribution system Maintains temperature within the food zone
- On/Off switch

ON/OFF switch is located on control panel

All stainless steel cabinet construction

The PRO series model boasts a stainless steel interior and a 22 gauge stainless steel exterior (galvanized steel top, bottom). It guarantees the utmost in cleanliness and long product life. The PRO series model adds a touch of style to the most refined setting.

Sturdy, clean stainless steel shelving

Shelves are the most important part of cleanliness as they come in direct contact with food. After a while, PVC coated wire shelves may peel, rust and lead to unsanitary conditions. Only the Turbo Air PRO series uniquely provides stainless steel shelving.

- LED interior lighting
- High-density polyurethane insulation The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.
- Full length stainless steel solid doors with locks
- Self-closing doors with stay open feature at 120 degrees
- Heated cabinet holds 140°F ~ 180°F for the best in food preservation
- Lifetime guaranteed heavy duty hinges and handles



PRO-50H	2	47.7	6	3000	15	462	513/4 x 337/8 x 78
Model	Swing Door	CU./FT.	#of Shelves	Wattage (W)	AMPS	Crated Weight (lbs.)	L x D [*] x H [†] (inches)
Intertek Intertek Intertek U. S. A CHARGY STAR							

Ver.20220613 Printed in U.S.A.

* Depth does not include 1-1/4" for door handles. † Height does not include 5" for caster height.

Solid Door Heated Cabinet

Model : PRO-50H

ELECTRICAL DATA					
Voltage	208/115/60/1				
Plug Type	NEMA L14-20P				
Full Load Amperes	15				
Wattage (W)	3000				
Cord Length (ft.)	8				
DIMENSIONAL DATA					
# of Doors	2				
# of Racks Accepted	2				
Net Capacity (cu. ft.)	47.7				
Ext. Length Overall (in.)	513/4 (1314mm)				
Ext. Depth Overall (in.)	337/8 (860mm)				
Ext. Height Overall (in.)*	78 (1982mm)				
Int. Length Overall (in.) [†]	421/4 (1073mm)				
Int. Depth Overall (in.)	275/8 (702mm)				
Int. Height Overall (in.)	583/4 (1493mm)				
# of Shelves	6				
Shelf Size (L x D) (in.)	223/4 x 263/8				
Net Weight (lbs.)	404				
Gross Weight (lbs.)	462				

Design and specifications subject to change without notice. Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 1-1/4" for door handles.

+ Height does not include 5" for caster height.

WARRANTY : 3 Year Parts and Labor Warranty

STANDARD FEATURES

- Door locks
- 4" dia. swivel casters with locks on the front set
- · Easy replaceable one piece magnetic door gaskets
- Solid and sturdy grille design
- ** Lead time applies. Please contact your sales representative for more details to order.

OPTIONAL ACCESSORIES

- 5" caster, 1/2" diameter & 13 TPI:
- M726500100 (non-brake), M726500200 (w/ brake)
- 4.7" leveling seismic leg (1/2", 13 TPI): 30221M0500
- 6" stainless steel leg: 30221M0600
- Additional stainless steel shelf: (L, R) H50R901700
- Half door bun tray rack: TSP-2224
- (each holds up to six 18"L x 26"D sheet pans)
- Full door bun tray rack: TSP-2250 (each holds up to fifteen 18"L x 26"D sheet pans)
- Tray slides kits: TS23-N1LR(#1), TS23-N1LR HALF, TS23-N4LR(#4), TS23-N4LR HALF, TS23-UNLR-H(Universal), TS23-UNLR-H HALF

(GERMAN

KNIFF

- (1) Pair of #1 Tray Slides: H26R104460
- (1) Pair of Universal Tray Slides: H26R104470


Ver.20220613


Intertek Intertek U. S. A Constraints August Intertek

1		CTURE

PLAN VIEW

(unit : inch)



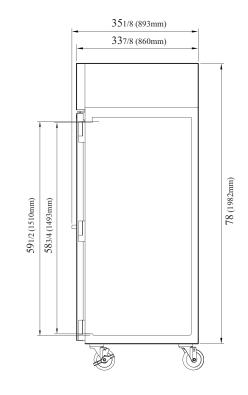

SIDE VIEW

Turbo Air : 800-627-0032 **GK** : 800-500-3519

Warranty : 800-381-7770 **AC** : 888-900-1002

IIIRADIANCE **Turbo** air **Texa**k**i**ng

Continued product development may necessitate specification changes without notice.