

Long Beach, CA 90808 Tel. 310-900-1000 Fax. 310-900-1077 www.turboairinc.com

Project:		
Model #:		
tem #:		
Available W/H:		Qty:
Approval:		
AIA#:	SIS #:	
CSI Section 11400		

Solid Door Freezer

🚐 FEATURES & BENEFITS 💻

Self-Cleaning Condenser

The accumulation of dust in the condenser can cause the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products inside. The Self-Cleaning Condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

Digital temperature control & monitor system

- · Keeps food products safe by maintaining constant temperatures · Alarms that sound when doors are not sealed shut; protect against food
- spoilage that originates from cold air leaks
- · Early warning alarm program detects issues before malfunction occurs
- · Digital display allows for easy monitoring
- · Programs interpret the condition of refrigeration systems by self-diagnosis
- Rapid cool-down function (Turbo Freeze)
- · Smart defrost system will defrost as needed
- · Automatic evaporator fan motor delays

Hydrocarbon refrigerants (R-290)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

Stainless steel cabinet construction

The Turbo Air Super Deluxe model boasts a stainless steel interior and exterior (galvanized steel top, bottom and back). It guarantees the utmost in cleanliness and long product life. Sharp corners and edges have been rounded to reduce the risk of injury. The Super Deluxe adds a touch of style to the most refined setting.

Sturdy, clean stainless steel shelving

Shelves are the most important part of cleanliness as they come in direct contact with food. After a while, PVC coated wire shelves may peel, rust and lead to unsanitary conditions. Only the Turbo Air Super Deluxe series uniquely provides stainless steel shelving.

Door pressure release device

Pressure relief doors are designed to eliminate vacuum pressure and allow easy door opening.


High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, HCFC free polyurethane insulation.

- LED interior lighting
- Bottom mount compressor

Freezer holds -10°F ~ 0°F for the best in frozen food preservation





NATURAL SPEC (CO. CO. STAR®



This product is equipped with a fine mesh filter to the front of the condenser to catch dust, and a rotating brush that moves up and down daily to remove excess buildup outward and away.

TSF-72SD-N	3	63.8	9	3/4	6.5	650	817/8 x 303/8 x 781/4
Model	Swing Door	CU./FT.	#of Shelves	HP	AMPS	Crated Weight (lbs.)	$L \ge D \ge H^*$ (inches)
				F	lefrigerant USO 900		WARRANTY (U.S.A only) Qualified

Ver.20240621 Printed in U.S.A.

* Height does not include 5" caster height

Reach-In Bottom Mount Super Deluxe Series

Model : TSF-72SD-N

Solid Door Freezer

(unit : inch)

Model : TSF-72SD-N

ELECTRICAL DATA					
Voltage	115/60/1				
Plug Type	• NEMA 5-20P				
Full Load Amperes	6.5				
Compressor HP	3/4				
Cord Length (ft.)	7				
Refrigerant	R-290				
DIMENSIONAL DATA					
# of Doors	3				
# of Racks Accepted	3				
Net Capacity (cu. ft.)	63.8				
Ext. Length Overall (in.)	817/8 (2080mm)				
Ext. Depth Overall (in.)	303/8 (770mm)				
Ext. Height Overall (in.)*	781/4 (1987mm)				
Int. Length Overall (in.)	78 (1980mm)				
Int. Depth Overall (in.)	261/8 (665mm)				
Int. Height Overall (in.)	521/4 (1328mm)				
# of Shelves	9				
Shelf Size (L x D) (in.)	241/2 x 231/2				
Net Weight (lbs.)	624				
Gross Weight (lbs.)	650				

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection. * Height does not include 5" caster height.

• WARRANTY : ⁵ Year Parts and Labor Warranty 7 Year Compressor Warranty

STANDARD FEATURES

- Anti-corrosion coated evaporator
- Door locks

NATURAL SPEC

- Positive seal self-closing doors
- · Easy replaceable one piece magnetic door gaskets
- Self-contained system
- · Solid and sturdy grille design
- 4" dia. swivel casters with locks on the front set

OPTIONAL ACCESSORIES

- 5" caster, 1/2" diameter & 13 TPI: M726500100 (non-brake), M726500200 (w/ brake)
- 6" stainless steel leg: 30221M0600

(II)

Intertek

- Additional stainless steel shelf: 30278Q0210
- Half door bun tray rack: TSP-2224 (each holds up to six 18"L x 26"D sheet pans)
- Full door bun tray rack: TSP-2250-T (each holds up to fifteen 18"L x 26"D sheet pans)

.(I)

7 YEAR

Qualified

Ver.20240621


ENERGY STAR®

- **Turbo Air:** 800-627-0032 **Radiance:** 800-500-3519
- **Warranty:** 800-381-7770 **AC**: 888-900-1002



FRONT VIEW

PLAN VIEW

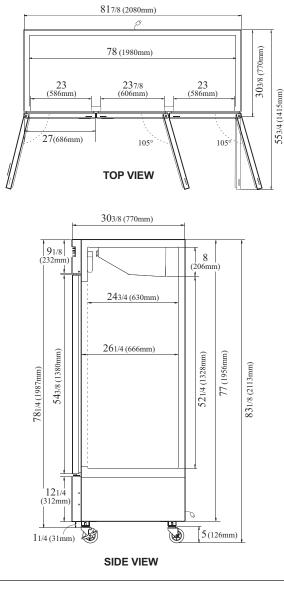

lurbo air Texaking lurbo air Continued product development may necessitate specification changes without notice