

2021 New Edition 90+ Models

REFRIGERATION REINVENTED
Turbo air

THE AAA
VALUE

Maintenance Cost (A)
Operating Cost (A)
Acquisition Cost (A)

= Low Ownership Cost

www.turboairinc.com



BEATING COVID-19
AS AMERICANS UNITED



Beating COVID-19 as Americans United

Our ancestors settled in the desolate land and have built the world's leading nation in technology, politics, military, civilization, education, and more within 245 years. We have accomplished significant achievements in the shortest period in the world.

Such accomplishments were possible because our ancestors never gave in to the numerous tribulations such as hostile natural environments and pestilences. Our pioneer ancestors' dream to create a great nation for their future generations fueled their indomitable courage and willing sacrifice in the face of all adversities.

COVID-19 presented itself as the most serious trial in 2020, as it inflicted upon us the most severe suffering that we have ever experienced in our lifetime.

Such unimaginable forbidden circumstances arose, like hugging our loved ones, even shaking hands with our close friends. Our nation, the leading country of the world, restricted traveling to and from foreign countries and canceled all activities and family gatherings. This forced hundreds and thousands of restaurants to be closed or were subjected to strict restrictions.

Under such circumstances, our foodservice industry was the most severely impacted. Nonetheless, it has survived miraculously due to perseverance, the foodservice industry's cornerstone. The industry's principles align with the American spirit, which one never backs down from an anticipated or unexpected adversary.

Coronavirus vaccines have begun distribution, and with the general population receiving their vaccinations soon, our industry will return to normalcy by the second or third quarter of this year.

I am confident that when normal economic activities return, it will revitalize the restaurant industry, and our industry will also have an opportunity for growth.

Despite the difficult economic situation last year, Turbo Air developed more than 340 new products. Such achievement was possible due to our conviction that any hardship can be overcome when we join our efforts with our partners. Your cooperation and help are deeply appreciated.

I wish you happiness and business growth in 2021.

Sincerely,


Brian S. Kim
Chief Engineer & CEO

Why Turbo Air ?

Turbo Air is proud to introduce this astonishing, convenient device as a great solution in the refrigeration industry:

Self-Cleaning Condenser

Did you know that dirty condenser coils are the main reason for most service calls?



Busy marketplaces and restaurant kitchens with heavy traffic accumulate massive amounts of dust. Dust is drawn through the fan and builds rapidly in the system, increasing energy consumption and the workload of the compressor which shortens its lifespan. Though condenser cleaning is

one of the most important maintenance procedures in refrigeration, whether you do it yourself or hire a technician, manually cleaning the condenser regularly is both costly and time consuming.

Major Issues



ENERGY CONSUMPTION
INCREASE



COMPRESSOR
FAILURE



HEALTH INSPECTION
FAILURE



MANUFACTURER
WARRANTY VOID

**Save on operating cost & maintenance cost
= Low ownership cost**

With Turbo Air's Self-Cleaning Condenser, operators could potentially save from \$200~\$800 on professional cleaning services per call, and save on repair costs related to compressor replacement.

Self-Cleaning Condenser is a standard feature at no additional cost and applicable on most of our product lines. Turbo Air's customers can enjoy the full 3-year warranty coverage without maintenance requirements.




SELF-CLEANING CONDENSER


HOW DOES IT WORK?

Turbo Air's patented Self-Cleaning Condenser is an innovative feature that uses a fine mesh filter to catch the dust, while the rotating brush moves up and down 2~3 times a day to remove the excess outward and away from the condenser, effectively preventing dust from accumulating in the first place.


This allows your system to maintain the highest efficiency while mitigating premature system failure.



Fine Mesh Filter



Rotating Brush



Prevent Dust Build up



Let's Watch Turbo Air's
Self-Cleaning Condenser Video!

Toll Free: 800-627-0032
www.turboairinc.com

Reach-In



PRO Series

Solid Doors / Glass Doors
Solid Doors / Glass Doors Drawers

M3 Series

Heated Cabinet Solid Doors / Glass Doors

HALF GLASS DOOR REFRIGERATORS NATURAL Refrigerant

Self-Cleaning Condenser Equipped Units

■ Self-Cleaning Condenser (Patented)

The accumulation of dust in the condenser can cause the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products inside. The Self-Cleaning Condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

■ Digital temperature control & monitor system

- Keep food products safe by maintaining constant temperatures.
- Alarms that sound when doors are not sealed shut; protect against food spoilage that originates from cold air leaks.
- Early warning alarm program detects issues before malfunction occurs.
- Digital display allows for easy monitoring.
- Programs interpret the condition of refrigeration systems by self-diagnosis.
- Rapid cool-down function (Turbo Cooling).
- Automatic evaporator fan motor delays.

■ Hydrocarbon refrigerants (R-290)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

■ Cold air distribution system

Provides uniformly maintained temperature within the food zone.

■ Hot gas condensate system

Through Turbo Air's creative innovation, the condensate system surfaces have been specially treated to resist corrosion. This not only increases efficiency without the risk of refrigerant leakage from corrosion, but also prevents the overflow of condensate water.

■ All stainless steel cabinet construction

The PRO series model boasts a stainless steel interior and a 22 gauge stainless steel exterior (galvanized steel top, bottom). It guarantees the utmost in cleanliness and long product life. The PRO series model adds a touch of style to the most refined setting.

■ Sturdy, clean stainless steel shelving

Shelves are the most important part of cleanliness as they come in direct contact with food. After a while, PVC coated wire shelves may peel, rust and lead to unsanitary conditions. Only the Turbo Air PRO series uniquely provides stainless steel shelving.

■ High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

Maintenance free,
Self-Cleaning Condenser



PRO-77-6R-G-N

■ LED interior lighting

■ Top mount compressor

■ Refrigerator holds 33°F ~ 38°F for the best in food preservation

■ Standard features

- Anti-corrosion coated evaporator
- Easily replaceable one-piece magnetic door gaskets
- Self-contained system
- Solid and sturdy grille design
- Door locks standard
- 4" dia. swivel casters with locks on the front set standard
- Thermostatic expansion valves
- USB temperature data storage
- Lead time applies

■ Optional features

- Legs available
- Half pan racks available
- Tray slides available

PRO-G MODELS SPECIFICATIONS

ELECTRICAL DATA		PRO-77-6R-G-N
Voltage		115/60/1
Plug Type		NEMA 5-15P
Full Load Amp.		9.0
Compressor HP		1
Feed Wires with Ground		3
Cord Length (ft.)		9
Refrigerant		R-290
DIMENSIONAL DATA		
Net Capacity (cu. ft.)		66.2
Ext.Dimension (L x D x H) (in.)		77 3/4 x 34 1/8* x 78†
Int.Dimension (L x D x H) (in.)		72 7/8 x 27 5/8 x 58 3/4
# of Doors		6
# of Racks Accepted		3
# of Shelves (Size (L x D) (in.))		9 (23 1/2 x 26 3/8(L), 25 x 26 3/8(M), 22 3/4 x 26 3/8(R))
Net Weight / Gross Weight (lbs.)		763 / 838

Design and specifications subject to change without notice. Most updated spec sheets are available at www.turboairinc.com.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 1-1/4" for door handles. † Height does not include 5" for caster height.

■ WARRANTY: 3 Year Parts and Labor Warranty, Additional 4 Year Warranty on Compressor

HALF SOLID DOOR REFRIGERATORS NATURAL Refrigerant

Self-Cleaning Condenser Equipped Units

■ Self-Cleaning Condenser (Patented)

The accumulation of dust in the condenser can cause the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products inside. The Self-Cleaning Condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

■ Digital temperature control & monitor system

- Keep food products safe by maintaining constant temperatures.
- Alarms that sound when doors are not sealed shut; protect against food spoilage that originates from cold air leaks.
- Early warning alarm program detects issues before malfunction occurs.
- Digital display allows for easy monitoring.
- Programs interpret the condition of refrigeration systems by self-diagnosis.
- Rapid cool-down function (Turbo Cooling).
- Automatic evaporator fan motor delays.

■ Hydrocarbon refrigerants (R-290)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

■ Cold air distribution system

Provides uniformly maintained temperature within the food zone.

■ Corrections - ready features

Our PRO series CRT units come fully equipped with all the required correctional facilities' features. It includes the stainless steel light cover with security screws, stainless steel PCB cover with security screws, hinges without covers, stainless mesh cover on top, locking hasp (padlock not included), tray slide with security screws, flanged leg, and tamper-resistant torx screws.

■ All stainless steel cabinet construction

The PRO series model boasts a stainless steel interior and a **22 gauge** stainless steel exterior (galvanized steel top, bottom). It guarantees the utmost in cleanliness and long product life. The PRO series model adds a touch of style to the most refined setting.

■ Sturdy, clean stainless steel shelving

Shelves are the most important part of cleanliness as they come in direct contact with food. After a while, PVC coated wire shelves may peel, rust and lead to unsanitary conditions. Only the Turbo Air PRO series uniquely provides stainless steel shelving.

Maintenance free,
Self-Cleaning Condenser



PRO-26-2R-N-CRT



PRO-50-4R-N-CRT

■ LED interior lighting

■ High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

■ Top mount compressor

■ Refrigerator holds 33°F ~ 38°F for the best in food preservation

■ Standard features

- Anti-corrosion coated evaporator
- Easily replaceable one-piece magnetic door gaskets
- Self-contained system
- Solid and sturdy grille design
- Door locks standard
- Thermostatic expansion valves
- Hot gas condensate system
- USB temperature data storage
- Lead time applies

■ Optional features

- Half pan racks available
- Tray slides available

PRO-R MODELS SPECIFICATIONS

ELECTRICAL DATA	PRO-26-2R-N-CRT	PRO-50-4R-N-CRT
Voltage	115/60/1	115/60/1
Plug Type	Ⓜ NEMA 5-15P	Ⓜ NEMA 5-15P
Full Load Amp.	7.0	8.0
Compressor HP	1/2	1/2
Feed Wires with Ground	3	3
Cord Length (ft.)	9	9
Refrigerant	R-290	R-290
DIMENSIONAL DATA		
Net Capacity (cu. ft.)	24.76	47.57
Ext.Dimension (L x D x H) (in.)	28 ³ / ₄ x 34 ¹ / ₈ * x 78 [†]	51 ³ / ₄ x 34 ¹ / ₈ * x 78 [†]
Int.Dimension (L x D x H) (in.)	23 ⁷ / ₈ x 27 ⁵ / ₈ x 58 ³ / ₄	46 ³ / ₄ x 27 ⁵ / ₈ x 58 ³ / ₄
# of Doors	2	4
# of Racks Accepted	1	2
# of Shelves (Size (L x D) (in.))	3 (23 ¹ / ₂ x 26 ³ / ₈)	6 (22 ⁷ / ₈ x 26 ³ / ₈ (L), 22 ³ / ₄ x 26 ³ / ₈ (R))
Net Weight (lbs.)	309	485
Gross Weight (lbs.)	352	538

Design and specifications subject to change without notice. Most updated spec sheets are available at www.turboairinc.com.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 1-1/4" for door handles. † Height does not include 4-3/4" for leg height.

■ **WARRANTY: 3 Year Parts and Labor Warranty, Additional 4 Year Warranty on Compressor**

SOLID DOOR FREEZERS NATURAL Refrigerant

Self-Cleaning Condenser Equipped Units

■ Self-Cleaning Condenser (Patented)

The accumulation of dust in the condenser can cause the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products inside. The Self-Cleaning Condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

■ Digital temperature control & monitor system

- Keep food products safe by maintaining constant temperatures.
- Alarms that sound when doors are not sealed shut; protect against food spoilage that originates from cold air leaks.
- Early warning alarm program detects issues before malfunction occurs.
- Digital display allows for easy monitoring.
- Programs interpret the condition of refrigeration systems by self-diagnosis.
- Rapid cool-down function (Turbo Freeze).
- Automatic evaporator fan motor delays.

■ Hydrocarbon refrigerants (R-290)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

■ Cold air distribution system

Provides uniformly maintained temperature within the food zone.

■ Corrections - ready features

Our PRO series CRT units come fully equipped with all the required correctional facilities' features. It includes the stainless steel light cover with security screws, stainless steel PCB cover with security screws, hinges without covers, stainless mesh cover on top, locking hasp (padlock not included), tray slide with security screws, flanged leg, and tamper-resistant torx screws.

■ All stainless steel cabinet construction

The PRO series model boasts a stainless steel interior and a **22 gauge** stainless steel exterior (galvanized steel top, bottom). It guarantees the utmost in cleanliness and long product life. The PRO series model adds a touch of style to the most refined setting.

■ Sturdy, clean stainless steel shelving

Shelves are the most important part of cleanliness as they come in direct contact with food. After a while, PVC coated wire shelves may peel, rust and lead to unsanitary conditions. Only the Turbo Air PRO series uniquely provides stainless steel shelving.

Maintenance free,
Self-Cleaning Condenser



PRO-26F-N-CRT

PRO-50F-N-CRT

■ LED interior lighting

■ High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

■ Top mount compressor

■ Freezer holds -10°F ~ 0°F for the best in food preservation

■ Standard features

- Anti-corrosion coated evaporator
- Easily replaceable one-piece magnetic door gaskets
- Self-contained system
- Solid and sturdy grille design
- Door locks standard
- Thermostatic expansion valves
- Hot gas condensate system
- USB temperature data storage
- Lead time applies

■ Optional features

- Full and half pan racks available
- Tray slides available

PRO-F MODELS SPECIFICATIONS

ELECTRICAL DATA	PRO-26F-N-CRT	PRO-50F-N-CRT
Voltage	115/60/1	115/60/1
Plug Type	Ⓜ NEMA 5-15P	Ⓜ NEMA 5-15P
Full Load Amp.	7.0	9.0
Compressor HP	1/2	1
Feed Wires with Ground	3	3
Cord Length (ft.)	9	9
Refrigerant	R-290	R-290
DIMENSIONAL DATA		
Net Capacity (cu. ft.)	25.35	48.36
Ext. Dimension (L x D x H) (in.)	28 3/4 x 34 1/8 x 78†	51 3/4 x 34 1/8 x 78†
Int. Dimension (L x D x H) (in.)	23 7/8 x 27 5/8 x 58 3/4	46 3/4 x 27 5/8 x 58 3/4
# of Doors	1	2
# of Racks Accepted	1	2
# of Shelves (Size (L x D) (in.))	3 (23 1/2 x 26 3/8)	6 (22 7/8 x 26 3/8(L), 22 3/4 x 26 3/8(R))
Net Weight (lbs.)	315	485
Gross Weight (lbs.)	356	538

Design and specifications subject to change without notice. Most updated spec sheets are available at www.turboairinc.com.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 1-1/4" for door handles. † Height does not include 4-3/4" for leg height.

■ WARRANTY: 3 Year Parts and Labor Warranty, Additional 4 Year Warranty on Compressor

HALF SOLID/GLASS DOOR REFRIGERATORS - Drawers

Self-Cleaning Condenser Equipped Units**Self-Cleaning Condenser (Patented)**

The accumulation of dust in the condenser can cause the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products inside. The Self-Cleaning Condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

Digital temperature control & monitor system

- Keep food products safe by maintaining constant temperatures.
- Alarms that sound when doors are not sealed shut; protect against food spoilage that originates from cold air leaks (except PRO-26R-D4-N).
- Early warning alarm program detects issues before malfunction occurs.
- Digital display allows for easy monitoring.
- Programs interpret the condition of refrigeration systems by self-diagnosis.
- Rapid cool-down function (Turbo Cooling).
- Automatic evaporator fan motor delays.

Hydrocarbon refrigerants (R-290)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

Cold air distribution system

Provides uniformly maintained temperature within the food zone.

Hot gas condensate system

Through Turbo Air's creative innovation, the condensate system surfaces have been specially treated to resist corrosion. This not only increases efficiency without the risk of refrigerant leakage from corrosion, but also prevents the overflow of condensate water.

All stainless steel cabinet construction

The PRO series model boasts a stainless steel interior and a **22 gauge** stainless steel exterior (galvanized steel top, bottom). It guarantees the utmost in cleanliness and long product life. The PRO series model adds a touch of style to the most refined setting.

Sturdy, clean stainless steel shelving

Shelves are the most important part of cleanliness as they come in direct contact with food. After a while, PVC coated wire shelves may peel, rust and lead to unsanitary conditions. Only the Turbo Air PRO series uniquely provides stainless steel shelving.

LED interior lighting**Maintenance free,
Self-Cleaning Condenser**

PRO-26R-D4-N



PRO-26R-G-D2-N

High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

Top mount compressor**Refrigerator holds 33°F ~ 38°F for the best in food preservation****Standard features**

- Anti-corrosion coated evaporator
- Self-contained system
- Thermostatic expansion valves
- Solid and sturdy grille design
- Easily replaceable one-piece magnetic door & drawer gaskets
- Drawers accommodate 6" deep pans (pans not included)
- Door locks standard
- 4" dia. swivel casters with locks on the front set standard
- USB temperature data storage
- Lead time applies

Optional features

- Legs available for all models
- Tray slide kit available (PRO-26R-D2-N, PRO-26R-G-D2-N)

PRO-R MODELS SPECIFICATIONS

ELECTRICAL DATA	PRO-26R-D2-N	PRO-26R-D4-N	PRO-26R-G-D2-N
Voltage	115/60/1	115/60/1	115/60/1
Plug Type	Ⓜ NEMA 5-15P	Ⓜ NEMA 5-15P	Ⓜ NEMA 5-15P
Full Load Amp.	7.0	7.0	7.0
Compressor HP	1/2	1/2	1/2
Feed Wires with Ground	3	3	3
Cord Length (ft.)	9	9	9
Refrigerant	R-290	R-290	R-290
DIMENSIONAL DATA			
Net Capacity (cu. ft.)	25.41	25.41	25.73
Ext.Dimension (L x D x H) (in.)	28 ³ / ₄ x 34 ¹ / ₈ x 78 [†]	28 ³ / ₄ x 34 ¹ / ₈ x 78 [†]	28 ³ / ₄ x 34 ¹ / ₈ x 78 [†]
Int.Dimension (L x D x H) (in.)	23 ⁷ / ₈ x 27 ⁵ / ₈ x 58 ³ / ₄	23 ⁷ / ₈ x 27 ⁵ / ₈ x 58 ³ / ₄	23 ⁷ / ₈ x 27 ⁵ / ₈ x 58 ³ / ₄
# of Doors	1	-	1
# of Drawers	2	4	2
# of Shelves (Size (L x D) (in.))	2 (23 ¹ / ₂ x 26 ³ / ₈)	-	2 (23 ¹ / ₂ x 26 ³ / ₈)
Net Weight (lbs.)	309	309	320
Gross Weight (lbs.)	352	352	365

Design and specifications subject to change without notice. Most updated spec sheets are available at www.turboairinc.com.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 1-1/4" for door and drawer handles. † Height does not include 5" for caster height.

WARRANTY: 3 Year Parts and Labor Warranty, Additional 4 Year Warranty on Compressor

SOLID DOOR HEATED CABINETS

Digital temperature control & monitor system

- Keep food products safe by maintaining constant temperatures.
- Alarm beeps when doors are not sealed.
- Digital display allows for easy monitoring.

Ducted fan air distribution system

Maintains temperature within the food zone.

On/Off switch

ON/OFF switch is located on control panel

Stainless steel exterior

The Turbo Air M3 heated cabinet model boasts a stainless steel exterior (galvanized steel top, bottom and back) and AL interior with stainless steel floor. It guarantees the utmost in cleanliness and long product life. Sharp corners and edges have been rounded to reduce the risk of injury. The M3 adds a touch of style to the most refined setting.

LED interior lighting

High-density polyurethane insulation

Structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

Full solid doors length stainless steel doors with locks

Self-closing doors with stay open feature at 120 degrees

Heated cabinet holds 140°F ~ 180°F for the best in food preservation

Field reversible door hinge (M3H24-1, M3H24-1-TS)

Stainless steel universal tray slides standard (M3H24-1-TS, M3H47-2-TS)

Each tray slide accommodates up to one (1) 6" deep full size pan or one (1) 18" x 26" size pan or two (2) 14" x 18" size pans or three (3) 12" x 20" size pans.

Standard features

- Door locks standard
- 4" dia. swivel casters with locks on the front set
- Easy replaceable one piece magnetic door gaskets
- Lead time applies

Optional features

- Legs available for all models
- Full and half pan racks available (M3H24-1, M3H47-2)



M3H MODELS SPECIFICATIONS

ELECTRICAL DATA	M3H24-1	M3H47-2	M3H24-1-TS	M3H47-2-TS
Voltage	115/60/1	115/60/1	115/60/1	115/60/1
Plug Type	Ⓜ NEMA 5-15P	Ⓜ NEMA 5-15P	Ⓜ NEMA 5-15P	Ⓜ NEMA 5-15P
Full Load Amp.	8.5	13.5	8.5	13.5
Feed Wires with Ground	3	3	3	3
Cord Length (ft.)	8	8	8	8
DIMENSIONAL DATA				
Net Capacity (cu. ft.)	22.3	42.9	22.3	42.9
Ext.Dimension (L x D x H) (in.)	28 ³ / ₄ x 30 ³ / ₄ x 78*	51 ³ / ₄ x 30 ³ / ₄ x 78*	28 ³ / ₄ x 30 ³ / ₄ x 78*	51 ³ / ₄ x 30 ³ / ₄ x 78*
Int.Dimension (L x D x H) (in.)	22 ³ / ₈ x 24 ⁵ / ₈ x 58 ³ / ₄	45 ¹ / ₄ x 25 ¹ / ₈ x 58 ³ / ₄	22 ³ / ₈ x 24 ⁵ / ₈ x 58 ³ / ₄	45 ¹ / ₄ x 25 ¹ / ₈ x 58 ³ / ₄
# of Doors	1	2	1	2
# of Racks Accepted	1	2	-	-
# of Shelves (Size (L x D) (in.))	3 (23 ¹ / ₂ x 21 ⁵ / ₈)	6 (23 ¹ / ₂ x 21 ⁵ / ₈)	-	-
# of Tray slides (pairs)	-	-	5	10
Net Weight (lbs.)	188	282	188	282
Gross Weight (lbs.)	231	345	231	345

Design and specifications subject to change without notice. Most updated spec sheets are available at www.turboairinc.com.

Actual shipping weight may differ due to extra packing materials for product protection.

* Height does not include 5" for caster height.

WARRANTY: 3 Year Parts and Labor Warranty

GLASS DOOR HEATED CABINETS

Digital temperature control & monitor system

- Keep food products safe by maintaining constant temperatures.
- Alarm beeps when doors are not sealed.
- Digital display allows for easy monitoring.

Ducted fan air distribution system

Maintains temperature within the food zone.

On/Off switch

ON/OFF switch is located on control panel



Stainless steel exterior

The Turbo Air M3 heated cabinet model boasts a stainless steel exterior (galvanized steel top, bottom and back) and AL interior with stainless steel floor. It guarantees the utmost in cleanliness and long product life. Sharp corners and edges have been rounded to reduce the risk of injury. The M3 adds a touch of style to the most refined setting.

LED interior lighting

High-density polyurethane insulation

Structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

Stainless steel doors with glass window

Self-closing doors with stay open feature at 120 degrees

Heated cabinet holds 140°F ~ 180°F for the best in food preservation

Field reversible door hinge (M3H24-1-G, M3H24-1-G-TS)

Stainless steel universal tray slides standard (M3H24-1-G-TS, M3H47-2-G-TS)

Each tray slide accommodates up to one (1) 6" deep full size pan or one (1) 18" x 26" size pan or two (2) 14" x 18" size pans or three (3) 12" x 20" size pans.

Standard features

- Door locks standard
- 4" dia. swivel casters with locks on the front set
- Easy replaceable one piece magnetic door gaskets
- Lead time applies

Optional features

- Legs available for all models
- Full and half pan racks available (M3H24-1-G, M3H47-2-G)



M3H24-1-G-TS

M3H47-2-G

M3H MODELS SPECIFICATIONS

ELECTRICAL DATA	M3H24-1-G	M3H47-2-G	M3H24-1-G-TS	M3H47-2-G-TS
Voltage	115/60/1	115/60/1	115/60/1	115/60/1
Plug Type	Ⓜ NEMA 5-15P	Ⓜ NEMA 5-15P	Ⓜ NEMA 5-15P	Ⓜ NEMA 5-15P
Full Load Amp.	8.5	13.5	8.5	13.5
Feed Wires with Ground	3	3	3	3
Cord Length (ft.)	8	8	8	8
DIMENSIONAL DATA				
Net Capacity (cu. ft.)	22.3	42.9	22.3	42.9
Ext.Dimension (L x D x H) (in.)	28 ³ / ₄ x 30 ³ / ₄ * x 78 [†]	51 ³ / ₄ x 30 ³ / ₄ * x 78 [†]	28 ³ / ₄ x 30 ³ / ₄ * x 78 [†]	51 ³ / ₄ x 30 ³ / ₄ * x 78 [†]
Int.Dimension (L x D x H) (in.)	22 ³ / ₈ x 24 ⁵ / ₈ x 58 ³ / ₄	45 ¹ / ₄ x 25 ¹ / ₈ x 58 ³ / ₄	22 ³ / ₈ x 24 ⁵ / ₈ x 58 ³ / ₄	45 ¹ / ₄ x 25 ¹ / ₈ x 58 ³ / ₄
# of Doors	1	2	1	2
# of Racks Accepted	1	2	-	-
# of Shelves (Size (L x D) (in.))	3 (23 ¹ / ₂ x 21 ⁵ / ₈)	6 (23 ¹ / ₂ x 21 ⁵ / ₈)	-	-
# of Tray slides (pairs)	-	-	5	10
Net Weight (lbs.)	201	304	201	304
Gross Weight (lbs.)	244	367	244	367

Design and specifications subject to change without notice. Most updated spec sheets are available at www.turboairinc.com.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 1-3/8" for door handles. † Height does not include 5" for caster height.

WARRANTY: 3 Year Parts and Labor Warranty

Food Prep Tables



PRO Series

Sandwich & Salad Units - Solid Doors / Drawers

Mega Top Units - Solid Doors / Drawers

M3 Series

Sandwich & Salad Units

E-line

Countertop Salad Tables

SANDWICH/SALAD UNITS NATURAL Refrigerant

Self-Cleaning Condenser Equipped Units

Self-Cleaning Condenser (Patented)

The accumulation of dust in the condenser can cause the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products inside. The Self-Cleaning Condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

Digital temperature control & monitor system

Keep food products safe by maintaining constant temperatures. External digital display allows for easy monitoring.

Hydrocarbon refrigerants (R-290)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

Cold Bunker system

Our innovative forced air system allows cold air to flow all around the food pan area, covering not only underneath the pan, but also the front, top and the rear. This unique air flow creates a cold air-shield around the pan, which maintains the food temperature at under 41°F (NSF requirement) even when the lids are opened. In addition, the compartment isolates pans from the reach-in area to prevent food spillage.

Stainless steel cabinet construction

The PRO series model boasts a stainless steel interior (Aluminum door liner) and a **22 gauge** stainless steel exterior (galvanized steel bottom). It guarantees the utmost in cleanliness and long product life. The PRO series adds a touch of style to the most refined setting.

Sturdy, clean stainless steel shelving

Shelves are the most important part of cleanliness as they come in direct contact with food. Only the PRO series uniquely provides stainless steel shelving.

9-1/2" deep, 1/2" thick high-density Polyethylene cutting board included with convenient side rail


Left hinged model available (PST-28-FB-N-L)

Spring assisted heavy duty gravity hinge

Easy removal hood & hood lid for cleaning

Front Breathing airflow

Front Breathing airflow is designed to draw in air and discharge from the front, allowing units to run at high efficiency in tight spaces and eliminates the need for surrounding clearances.



LED interior lighting & fan control (only at Turbo Air)

Energy efficient LED lighting lights every corner, making items easy to find. Fan control function automatically shuts off the fan when the door is open, which prevents hot air from being drawn in, thus maintaining the cool inner temperature.

Insulated hood & hood lid

Refrigerator holds 33°F ~ 39°F for the best in food preservation

Standard features

- Anti-corrosion coated evaporator
- Self-contained system
- Standard 4" dia. swivel casters with locks on the front set
- Standard 1/6 size, 4" deep condiment pans included
- Door locks standard
- High-density polyurethane insulation
- Lead time applies

Optional features

- Stainless steel overshelf available (except PST-28-FB-N)
- Removable food covers available
- Legs available for all models: 6" high
- Casters available for all models: 1", 2.5", 5"

PST MODELS SPECIFICATIONS

ELECTRICAL DATA	PST-28-FB-N	PST-48-FB-N	PST-60-FB-N	PST-72-FB-N
Voltage	115/60/1	115/60/1	115/60/1	115/60/1
Plug Type	Ⓜ NEMA 5-15P	Ⓜ NEMA 5-15P	Ⓜ NEMA 5-15P	Ⓜ NEMA 5-15P
Full Load Amp.	6.6	6.5	8.9	9.9
Compressor HP	1/6	1/5	1/5	3/8
Cord Length (ft.)	10	9	9	9
Refrigerant	R-290	R-290	R-290	R-290
DIMENSIONAL DATA				
Net Capacity (cu. ft.)	7.12	13.4	16.9	20.5
Ext.Dimension (L x D x H) (in.)	27 1/2 x 34" x 37"†	48 1/4 x 30" x 37"†	60 1/4 x 30" x 37"†	72 5/8 x 30" x 37"†
# of Doors	1	2	2	2
# of Shelves (Size (L x D) (in.))	1 (22 1/2 x 17)	2 (21 x 17)	2 (27 x 17)	2 (33 1/8 x 17)
# of Pans	8	12	16	18
Net Weight (lbs.)	216	255	298	361
Gross Weight (lbs.)	220	272	316	372

Design and specifications subject to change without notice. Most updated spec sheets are available at www.turboairinc.com.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 3/4" for door handles. † Height does not include 5-1/8" for caster height.

WARRANTY: 3 Year Parts and Labor Warranty, Additional 4 Year Warranty on Compressor

SANDWICH/SALAD UNITS - DRAWERS NATURAL Refrigerant

Self-Cleaning Condenser Equipped Units

Self-Cleaning Condenser (Patented)

The accumulation of dust in the condenser can cause the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products inside. The Self-Cleaning Condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

Digital temperature control & monitor system

Keep food products safe by maintaining constant temperatures. External digital display allows for easy monitoring.

Hydrocarbon refrigerants (R-290)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

Cold Bunker system

Our innovative forced air system allows cold air to flow all around the food pan area, covering not only underneath the pan, but also the front, top and the rear. This unique air flow creates a cold air-shield around the pan, which maintains the food temperature at under 41°F (NSF requirement) even when the lids are opened. In addition, the compartment isolates pans from the reach-in area to prevent food spillage.

Stainless steel cabinet construction

The PRO series model boasts a stainless steel interior (Aluminum door liner) and a **22 gauge** stainless steel exterior (galvanized steel bottom). It guarantees the utmost in cleanliness and long product life. The PRO series adds a touch of style to the most refined setting.

Sturdy, clean stainless steel shelving

Shelves are the most important part of cleanliness as they come in direct contact with food. Only the PRO series uniquely provides stainless steel shelving.

9-1/2" deep, 1/2" thick high-density Polyethylene cutting board included with convenient side rail

Spring assisted heavy duty gravity hinge

Easy removal hood & hood lid for cleaning

Front Breathing airflow

Front Breathing airflow is designed to draw in air and discharge from the front, allowing units to run at high efficiency in tight spaces and eliminates the need for surrounding clearances.



LED interior lighting & fan control (only at Turbo Air)

Energy efficient LED lighting lights every corner, making items easy to find. Fan control function automatically shuts off the fan when the door is open, which prevents hot air from being drawn in, thus maintaining the cool inner temperature (Only PST-48-D2R(L)-FB-N).

Insulated hood & hood lid

Refrigerator holds 33°F ~ 39°F for the best in food preservation

Standard features

- Anti-corrosion coated evaporator
- Self-contained system
- High-density polyurethane insulation
- Standard 4" dia. swivel casters with locks on the front set
- Standard 1/6 size, 4" deep condiment pans included
- Drawers accommodate 6" deep pans (pans not included)
- Door locks standard
- Lead time applies

Optional features

- Stainless steel overself available (except PST-28-D2-FB-N)
- Removable food covers available
- Legs available for all models: 6" high
- Casters available for all models: 1", 2.5", 5"

PST MODELS SPECIFICATIONS

ELECTRICAL DATA	PST-28-D2-FB-N	PST-48-D2R(L)-FB-N	PST-48-D4-FB-N
Voltage	115/60/1	115/60/1	115/60/1
Plug Type	Ⓜ NEMA 5-15P	Ⓜ NEMA 5-15P	Ⓜ NEMA 5-15P
Full Load Amp.	6.6	6.5	6.5
Compressor HP	1/6	1/5	1/5
Cord Length (ft.)	10	9	9
Refrigerant	R-290	R-290	R-290
DIMENSIONAL DATA			
Net Capacity (cu. ft.)	7.12	13.4	13.4
Ext.Dimension (L x D x H) (in.)	27 1/2 x 34" x 37"†	48 1/4 x 30" x 37"†	48 1/4 x 30" x 37"†
# of Doors	-	1	-
# of Drawers	2	2	4
# of Shelves (Size (L x D) (in.))	-	1 (21 x 17)	-
# of Pans	8	12	12
Net Weight (lbs.)	216	260	276
Gross Weight (lbs.)	220	266	282

Design and specifications subject to change without notice. Most updated spec sheets are available at www.turboairinc.com.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 3/4" for door handles. † Height does not include 5-1/8" for caster height.

WARRANTY: 3 Year Parts and Labor Warranty, Additional 4 Year Warranty on Compressor

SANDWICH/SALAD UNITS - DRAWERS NATURAL Refrigerant

Self-Cleaning Condenser Equipped Units

Self-Cleaning Condenser (Patented)

The accumulation of dust in the condenser can cause the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products inside. The Self-Cleaning Condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

Digital temperature control & monitor system

Keep food products safe by maintaining constant temperatures. External digital display allows for easy monitoring.

Hydrocarbon refrigerants (R-290)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

Cold Bunker system

Our innovative forced air system allows cold air to flow all around the food pan area, covering not only underneath the pan, but also the front, top and the rear. This unique air flow creates a cold air-shield around the pan, which maintains the food temperature at under 41°F (NSF requirement) even when the lids are opened. In addition, the compartment isolates pans from the reach-in area to prevent food spillage.

Stainless steel cabinet construction

The PRO series model boasts a stainless steel interior (Aluminum door liner) and a **22 gauge** stainless steel exterior (galvanized steel bottom). It guarantees the utmost in cleanliness and long product life. The PRO series adds a touch of style to the most refined setting.

Sturdy, clean stainless steel shelving

Shelves are the most important part of cleanliness as they come in direct contact with food. Only the PRO series uniquely provides stainless steel shelving.

9-1/2" deep, 1/2" thick high-density Polyethylene cutting board included with convenient side rail

Spring assisted heavy duty gravity hinge


Easy removal hood & hood lid for cleaning

Front Breathing airflow

Front Breathing airflow is designed to draw in air and discharge from the front, allowing units to run at high efficiency in tight spaces and eliminates the need for surrounding clearances.



PST-60-D4-FB-N



LED interior lighting & fan control (only at Turbo Air)

Energy efficient LED lighting lights every corner, making items easy to find. Fan control function automatically shuts off the fan when the door is open, which prevents hot air from being drawn in, thus maintaining the cool inner temperature (Only PST-60-D2R(L)-FB-N, PST-72-D2R(L)-FB-N).

Insulated hood & hood lid

Refrigerator holds 33°F ~ 39°F for the best in food preservation

Standard features

- Anti-corrosion coated evaporator
- Self-contained system
- Standard 4" dia. swivel casters with locks on the front set
- Standard 1/6 size, 4" deep condiment pans included
- Drawers accommodate 6" deep pans (pans not included)
- Door locks standard
- High-density polyurethane insulation
- Lead time applies

Optional features

- Stainless steel overshelf available
- Removable food covers available
- Legs available for all models: 6" high
- Casters available for all models: 1", 2.5", 5"

PST MODELS SPECIFICATIONS

ELECTRICAL DATA	PST-60-D2R(L)-FB-N	PST-60-D4-FB-N	PST-72-D2R(L)-FB-N	PST-72-D4-FB-N
Voltage	115/60/1	115/60/1	115/60/1	115/60/1
Plug Type	Ⓜ NEMA 5-15P	Ⓜ NEMA 5-15P	Ⓜ NEMA 5-15P	Ⓜ NEMA 5-15P
Full Load Amp.	8.9	8.9	9.9	9.9
Compressor HP	1/5	1/5	3/8	3/8
Cord Length (ft.)	9	9	9	9
Refrigerant	R-290	R-290	R-290	R-290
DIMENSIONAL DATA				
Net Capacity (cu. ft.)	16.9	16.9	20.5	20.5
Ext.Dimension (L x D x H) (in.)	60 1/4 x 30" x 37"†	60 1/4 x 30" x 37"†	72 5/8 x 30" x 37"†	72 5/8 x 30" x 37"†
# of Doors	1	-	1	-
# of Drawers	2	4	2	4
# of Shelves (Size (L x D) (in.))	1 (27 x 17)	-	1 (33 1/8 x 17)	-
# of Pans	16	16	18	18
Net Weight (lbs.)	298	298	361	361
Gross Weight (lbs.)	316	316	372	372

Design and specifications subject to change without notice. Most updated spec sheets are available at www.turboairinc.com.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 3/4" for door handles. † Height does not include 5-1/8" for caster height.

WARRANTY: 3 Year Parts and Labor Warranty, Additional 4 Year Warranty on Compressor

MEGA TOP UNITS NATURAL Refrigerant

Self-Cleaning Condenser Equipped Units

Self-Cleaning Condenser (Patented)

The accumulation of dust in the condenser can cause the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products inside. The Self-Cleaning Condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

Digital temperature control & monitor system

Keep food products safe by maintaining constant temperatures. External digital display allows for easy monitoring.

Hydrocarbon refrigerants (R-290)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

Cold Bunker system

Our innovative forced air system allows cold air to flow all around the food pan area, covering not only underneath the pan, but also the front, top and the rear. This unique air flow creates a cold air-shield around the pan, which maintains the food temperature at under 41°F (NSF requirement) even when the lids are opened. In addition, the compartment isolates pans from the reach-in area to prevent food spillage.

Stainless steel cabinet construction

The PRO series model boasts a stainless steel interior (Aluminum door liner) and a **22 gauge** stainless steel exterior (galvanized steel bottom). It guarantees the utmost in cleanliness and long product life. The PRO series adds a touch of style to the most refined setting.

Sturdy, clean stainless steel shelving

Shelves are the most important part of cleanliness as they come in direct contact with food. Only the PRO series uniquely provides stainless steel shelving.


9-1/2" deep, 1/2" thick high-density Polyethylene cutting board included with convenient side rail

Left hinged model available (PST-28-12-FB-N-L)

Spring assisted heavy duty gravity hinge

Front Breathing airflow

Front Breathing airflow is designed to draw in air and discharge from the front, allowing units to run at high efficiency in tight spaces and eliminates the need for surrounding clearances.



LED interior lighting & fan control (only at Turbo Air)

Energy efficient LED lighting lights every corner, making items easy to find. Fan control function automatically shuts off the fan when the door is open, which prevents hot air from being drawn in, thus maintaining the cool inner temperature.

Easy removal hood & hood lid for cleaning

Insulated hood & hood lid

Refrigerator holds 33°F ~ 39°F for the best in food preservation

Standard features

- Anti-corrosion coated evaporator
- Self-contained system
- Standard 4" dia. swivel casters with locks on the front set
- Standard 1/6 size, 4" deep condiment pans included
- Door locks standard
- High-density polyurethane insulation
- Lead time applies

Optional features

- Stainless steel overshell available (except PST-28-12-FB-N)
- Removable food covers available
- Legs available for all models: 6" high
- Casters available for all models: 1", 2.5", 5"

PST MODELS SPECIFICATIONS

ELECTRICAL DATA	PST-28-12-FB-N	PST-48-18-FB-N	PST-60-24-FB-N	PST-72-30-FB-N
Voltage	115/60/1	115/60/1	115/60/1	115/60/1
Plug Type	Ⓜ NEMA 5-15P	Ⓜ NEMA 5-15P	Ⓜ NEMA 5-15P	Ⓜ NEMA 5-15P
Full Load Amp.	6.6	6.5	8.9	9.9
Compressor HP	1/6	1/5	1/5	3/8
Cord Length (ft.)	10	9	9	9
Refrigerant	R-290	R-290	R-290	R-290
DIMENSIONAL DATA				
Net Capacity (cu. ft.)	7.12	13.4	16.9	20.5
Ext. Dimension (L x D x H) (in.)	27 1/2 x 34" x 39 1/8"†	48 1/4 x 34" x 39 1/8"†	60 1/4 x 34" x 39 1/8"†	72 5/8 x 34" x 39 1/8"†
# of Doors	1	2	2	2
# of Shelves (Size (L x D) (in.))	1 (22 1/2 x 17)	2 (21 x 17)	2 (27 x 17)	2 (33 1/8 x 17)
# of Pans	12	18	24	30
Net Weight (lbs.)	216	256	337	384
Gross Weight (lbs.)	220	264	352	410

Design and specifications subject to change without notice. Most updated spec sheets are available at www.turboairinc.com.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 3" for cutting boards. † Height does not include 5-1/8" for caster height.

WARRANTY: 3 Year Parts and Labor Warranty, Additional 4 Year Warranty on Compressor

MEGA TOP UNITS - DRAWERS

NATURAL
Refrigerant

Self-Cleaning Condenser Equipped Units

Self-Cleaning Condenser (Patented)

The accumulation of dust in the condenser can cause the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products inside. The Self-Cleaning Condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

Digital temperature control & monitor system

Keep food products safe by maintaining constant temperatures. External digital display allows for easy monitoring.

Hydrocarbon refrigerants (R-290)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

Cold Bunker system

Our innovative forced air system allows cold air to flow all around the food pan area, covering not only underneath the pan, but also the front, top and the rear. This unique air flow creates a cold air-shield around the pan, which maintains the food temperature at under 41°F (NSF requirement) even when the lids are opened. In addition, the compartment isolates pans from the reach-in area to prevent food spillage.

Stainless steel cabinet construction

The PRO series model boasts a stainless steel interior (Aluminum door liner) and a **22 gauge** stainless steel exterior (galvanized steel bottom). It guarantees the utmost in cleanliness and long product life. The PRO series adds a touch of style to the most refined setting.

Sturdy, clean stainless steel shelving

Shelves are the most important part of cleanliness as they come in direct contact with food. Only the PRO series uniquely provides stainless steel shelving.

9-1/2" deep, 1/2" thick high-density Polyethylene cutting board included with convenient side rail

Spring assisted heavy duty gravity hinge

Easy removal hood & hood lid for cleaning

Front Breathing airflow

Front Breathing airflow is designed to draw in air and discharge from the front, allowing units to run at high efficiency in tight spaces and eliminates the need for surrounding clearances.



LED interior lighting & fan control (only at Turbo Air)

Energy efficient LED lighting lights every corner, making items easy to find. Fan control function automatically shuts off the fan when the door is open, which prevents hot air from being drawn in, thus maintaining the cool inner temperature (Only PST-48-18-D2R(L)-FB-N, PST-60-24-D2R(L)-FB-N).

Insulated hood & hood lid

Refrigerator holds 33°F ~ 39°F for the best in food preservation

Standard features

- Anti-corrosion coated evaporator
- Self-contained system
- High-density polyurethane insulation
- Standard 4" dia. swivel casters with locks on the front set
- Standard 1/6 size, 4" deep condiment pans included
- Drawers accommodate 6" deep pans (pans not included)
- Door locks standard
- Lead time applies

Optional features

- Stainless steel overself available (except PST-28-12-D2-FB-N)
- Removable food covers available
- Legs available for all models: 6" high
- Casters available for all models: 1", 2.5", 5"

PST MODELS SPECIFICATIONS

ELECTRICAL DATA	PST-28-12-D2-FB-N	PST-48-18-D2R(L)-FB-N	PST-48-18-D4-FB-N	PST-60-24-D2R(L)-FB-N
Voltage	115/60/1	115/60/1	115/60/1	115/60/1
Plug Type	Ⓜ NEMA 5-15P	Ⓜ NEMA 5-15P	Ⓜ NEMA 5-15P	Ⓜ NEMA 5-15P
Full Load Amp.	6.6	6.5	6.5	8.9
Compressor HP	1/6	1/5	1/5	1/5
Cord Length (ft.)	10	9	9	9
Refrigerant	R-290	R-290	R-290	R-290
DIMENSIONAL DATA				
Net Capacity (cu. ft.)	7.12	13.4	13.4	16.9
Ext. Dimension (L x D x H) (in.)	27 1/2 x 34" x 39 1/8"†	48 1/4 x 34" x 39 1/8"†	48 1/4 x 34" x 39 1/8"†	60 1/4 x 34" x 39 1/8"†
# of Doors	-	1	-	1
# of Drawers	2	2	4	2
# of Shelves (Size (L x D) (in.))	-	1 (21 x 17)	-	1 (27 x 17)
# of Pans	12	18	18	24
Net Weight (lbs.)	216	256	256	337
Gross Weight (lbs.)	220	264	264	352

Design and specifications subject to change without notice. Most updated spec sheets are available at www.turboairinc.com.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 3" for cutting boards. † Height does not include 5-1/8" for caster height.

WARRANTY: 3 Year Parts and Labor Warranty, Additional 4 Year Warranty on Compressor

MEGA TOP UNITS - DRAWERS NATURAL Refrigerant

Self-Cleaning Condenser Equipped Units

■ Self-Cleaning Condenser (Patented)

The accumulation of dust in the condenser can cause the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products inside. The Self-Cleaning Condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

■ Digital temperature control & monitor system

Keep food products safe by maintaining constant temperatures. External digital display allows for easy monitoring.

■ Hydrocarbon refrigerants (R-290)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

■ Cold Bunker system

Our innovative forced air system allows cold air to flow all around the food pan area, covering not only underneath the pan, but also the front, top and the rear. This unique air flow creates a cold air-shield around the pan, which maintains the food temperature at under 41°F (NSF requirement) even when the lids are opened. In addition, the compartment isolates pans from the reach-in area to prevent food spillage.

■ Stainless steel cabinet construction

The PRO series model boasts a stainless steel interior (Aluminum door liner) and a **22 gauge** stainless steel exterior (galvanized steel bottom). It guarantees the utmost in cleanliness and long product life. The PRO series adds a touch of style to the most refined setting.

■ Sturdy, clean stainless steel shelving

Shelves are the most important part of cleanliness as they come in direct contact with food. Only the PRO series uniquely provides stainless steel shelving.

■ 9-1/2" deep, 1/2" thick high-density Polyethylene cutting board included with convenient side rail

■ Spring assisted heavy duty gravity hinge


■ Easy removal hood & hood lid for cleaning

■ Front Breathing airflow

Front Breathing airflow is designed to draw in air and discharge from the front, allowing units to run at high efficiency in tight spaces and eliminates the need for surrounding clearances.



PST-72-30-D4-FB-N



Maintenance free,
Self-Cleaning
Condenser

LED interior lighting & fan control (only at Turbo Air)

Energy efficient LED lighting lights every corner, making items easy to find. Fan control function automatically shuts off the fan when the door is open, which prevents hot air from being drawn in, thus maintaining the cool inner temperature (Only PST-72-30-D2R(L)-FB-N).

■ Insulated hood & hood lid

■ Refrigerator holds 33°F ~ 39°F for the best in food preservation

■ Standard features

- Anti-corrosion coated evaporator
- Self-contained system
- Standard 4" dia. swivel casters with locks on the front set
- Standard 1/6 size, 4" deep condiment pans included
- Drawers accommodate 6" deep pans (pans not included)
- Door locks standard
- High-density polyurethane insulation
- Lead time applies

■ Optional features

- Stainless steel single/double overshef available
- Removable food covers available
- Legs available for all models: 6" high
- Casters available for all models: 1", 2.5", 5"

PST MODELS SPECIFICATIONS

ELECTRICAL DATA	PST-60-24-D4-FB-N	PST-72-30-D2R(L)-FB-N	PST-72-30-D4-FB-N
Voltage	115/60/1	115/60/1	115/60/1
Plug Type	Ⓜ NEMA 5-15P	Ⓜ NEMA 5-15P	Ⓜ NEMA 5-15P
Full Load Amp.	8.9	9.9	9.9
Compressor HP	1/5	3/8	3/8
Cord Length (ft.)	9	9	9
Refrigerant	R-290	R-290	R-290
DIMENSIONAL DATA			
Net Capacity (cu. ft.)	16.9	20.5	20.5
Ext.Dimension (L x D x H) (in.)	60 1/4 x 34" x 39 1/8"†	72 5/8 x 34" x 39 1/8"†	72 5/8 x 34" x 39 1/8"†
# of Doors	-	1	-
# of Drawers	4	2	4
# of Shelves (Size (L x D) (in.))	-	1 (33 1/8 x 17)	-
# of Pans	24	30	30
Net Weight (lbs.)	337	384	384
Gross Weight (lbs.)	352	410	410

Design and specifications subject to change without notice. Most updated spec sheets are available at www.turboairinc.com.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 3" for cutting boards. † Height does not include 5-1/8" for caster height.

■ WARRANTY: 3 Year Parts and Labor Warranty, Additional 4 Year Warranty on Compressor

SANDWICH/SALAD UNITS - CLEAR LID NATURAL Refrigerant

Digital temperature control & monitor system

Keep food products safe by maintaining constant temperatures. External digital display allows for easy monitoring.

Hydrocarbon refrigerants (R-600a)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

Cold Bunker system

Our innovative forced air system allows cold air to flow all around the food pan area, covering not only underneath the pan, but also the front, top and the rear. This unique air flow creates a cold air-shield around the pan, which maintains the food temperature at under 41°F (NSF requirement) even when the lids are opened. In addition, the compartment isolates pans from the reach-in area to prevent food spillage.

Stainless steel exterior

The Turbo Air M3 model boasts a stainless steel exterior (galvanized steel back and bottom). Interior is AL interior with stainless steel floor and ABS door liner. It guarantees the utmost in cleanliness and long product life. The M3 model adds a touch of style to the most refined setting.

High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

Ergonomically designed doors


Customers' fatigue fades away with easy grip handles and doors that open effortlessly. These features along with self-closing doors make this the ultimate choice in customer convenience. ABS sheet door liners resist water condensation with thermal efficiency.

9-1/2" deep, 1/2" thick high-density Polyethylene cutting board included with convenient side rail

Adjustable, heavy duty, PE (polyethylene) coated wire shelves

Front Breathing airflow

Front Breathing airflow is designed to draw in air and discharge from the front, allowing units to run at high efficiency in tight spaces and eliminates the need for surrounding clearances.



LED interior lighting & fan control (only at Turbo Air)

Energy efficient LED lighting lights every corner, making items easy to find. Fan control function automatically shuts off the fan when the door is open, which prevents hot air from being drawn in, thus maintaining the cool inner temperature.

Refrigerator holds 33°F ~ 39°F for the best in food preservation

Standard features

- Anti-corrosion coated evaporator
- Self-contained system
- Standard 3" dia. swivel casters with locks on the front set
- Standard 1/6 size, 4" deep condiment pans included
- High-density polyurethane insulation
- Lead time applies (8~10 weeks)

Optional features

- Legs available for all models
- Door locks available (extra lead time will apply)
- 2.5" dia. casters available - 1/2" diameter & 13 TPI

MST MODELS SPECIFICATIONS

ELECTRICAL DATA		MST-24S-N6
Voltage		115/60/1
Plug Type		Ⓜ NEMA 5-15P
Full Load Amp.		2.6
Compressor HP		1/5
Cord Length (ft.)		10
Refrigerant		R-600a
DIMENSIONAL DATA		
Net Capacity (cu. ft.)		2.83
Ext.Dimension (L x D x H) (in.)		24 x 23 ^{5/8} x 28 ^{1/8} †
# of Doors		1
# of Shelves		1
Shelf Size (L x D) (in.)		19 ^{3/8} x 11 ^{1/8}
# of Pan		6
Net Weight (lbs.)		126
Gross Weight (lbs.)		137

Design and specifications subject to change without notice. Most updated spec sheets are available at www.turboairinc.com.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 1" for rear spacers. Depth does not include 3-3/8" for cutting board. † Height does not include 3-7/8" for caster height.

WARRANTY: 3 Year Parts and Labor Warranty, Additional 2 Year Warranty on Compressor

COUNTERTOP SALAD TABLES **NATURAL Refrigerant**

■ Hydrocarbon refrigerants (R-290)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

■ Digital temperature display on front panel

Keep food products safe by maintaining constant temperatures. External digital display allows for easy monitoring.

■ Stainless steel cabinet construction

The Turbo Air model boasts a stainless steel interior and exterior. It guarantees the utmost in cleanliness and long product life. The countertop salad table adds a touch of style to the most refined setting.

■ Side mount compressor makes it easy to be serviced without being moved

■ High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

■ Easy cleaning and excellent durability

■ Static cooling system

■ Stainless steel lids

■ On/off Power switch easily accessible

■ Refrigerator holds 32°F ~ 41°F for the best in food preservation

■ Standard features

- Self-contained system
- ABS legs standard
- Accommodates standard GN 1/3 or 1/6 size, 6" deep condiment pans (pans not included)
- Lead time applies



CTST-1200-13-N



CTST-1500-13-N

CTST MODELS SPECIFICATIONS

ELECTRICAL DATA		CTST-1200-13-N	CTST-1500-13-N	CTST-1800-13-N
Voltage		115/60/1	115/60/1	115/60/1
Plug Type		Ⓢ NEMA 5-15P	Ⓢ NEMA 5-15P	Ⓢ NEMA 5-15P
Full Load Amp.		2	2	2
Compressor HP		1/6	1/6	1/4
Cord Length (ft.)		9	9	9
Refrigerant		R-290	R-290	R-290
DIMENSIONAL DATA				
Ext. Dimension (L x D x H) (in.)		47 1/4 x 15 1/2 x 9 7/8*	59 x 15 1/2 x 9 7/8*	70 7/8 x 15 1/2 x 9 7/8*
Pan Dimension (L x W) (in.) (# of Pans)	1/6	6 7/8 x 6 3/8 (8)	6 7/8 x 6 3/8 (12)	6 7/8 x 6 3/8 (16)
	1/3	12 3/4 x 6 7/8 (4)	12 3/4 x 6 7/8 (6)	12 3/4 x 6 7/8 (8)
Net Weight (lbs.)		66	77	88
Gross Weight (lbs.)		77	88	100

Design and specifications subject to change without notice. Most updated spec sheets are available at www.turboairinc.com.

Actual shipping weight may differ due to extra packing materials for product protection.

* Height does not include 3/8" for leg height.

■ WARRANTY: 2 Year Parts and Labor Warranty Additional 3 Year Warranty on Compressor

COUNTERTOP SALAD TABLES - CLEAR HOOD

NATURAL
Refrigerant

■ Hydrocarbon refrigerants (R-290)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

■ Digital temperature display on front panel

Keep food products safe by maintaining constant temperatures. External digital display allows for easy monitoring.

■ Stainless steel cabinet construction

The Turbo Air model boasts a stainless steel interior and exterior. It guarantees the utmost in cleanliness and long product life. The countertop salad table adds a touch of style to the most refined setting.

■ Side mount compressor makes it easy to be serviced without being moved

■ High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

■ Easy cleaning and excellent durability

■ Static cooling system

■ On/off Power switch easily accessible

■ Refrigerator holds 32°F ~ 41°F for the best in food preservation

■ Standard features

- Self-contained system
- ABS legs standard
- Accommodates standard GN 1/3 or 1/6 size, 6" deep condiment pans (pans not included)
- Lead time applies



CTST-1200G-13-N



CTST-1500G-13-N

CTST MODELS SPECIFICATIONS

ELECTRICAL DATA		CTST-1200G-13-N	CTST-1500G-13-N	CTST-1800G-13-N
Voltage		115/60/1	115/60/1	115/60/1
Plug Type		Ⓜ NEMA 5-15P	Ⓜ NEMA 5-15P	Ⓜ NEMA 5-15P
Full Load Amp.		2	2	2
Compressor HP		1/6	1/6	1/4
Cord Length (ft.)		9	9	9
Refrigerant		R-290	R-290	R-290
DIMENSIONAL DATA				
Ext. Dimension (L x D x H) (in.)		47 1/4 x 15 1/2 x 16 3/4*	59 x 15 1/2 x 16 3/4*	70 7/8 x 15 1/2 x 16 3/4*
Pan Dimension (L x W) (in.) (# of Pans)	1/6	6 7/8 x 6 3/8 (8)	6 7/8 x 6 3/8 (12)	6 7/8 x 6 3/8 (16)
	1/3	12 3/4 x 6 7/8 (4)	12 3/4 x 6 7/8 (6)	12 3/4 x 6 7/8 (8)
Net Weight (lbs.)		66	77	88
Gross Weight (lbs.)		77	88	100

Design and specifications subject to change without notice. Most updated spec sheets are available at www.turboairinc.com.

Actual shipping weight may differ due to extra packing materials for product protection.

* Height does not include 3/8" for leg height.

■ WARRANTY: 2 Year Parts and Labor Warranty Additional 3 Year Warranty on Compressor

Glass Door Merchandisers



Super Deluxe Series
Swing Door Refrigerators

Super Deluxe Jumbo Series
Swing Door Refrigerators
Swing Door Freezers

Ice Merchandisers

FULL VIEW GLASS DOOR MERCHANDISERS

NATURAL
Refrigerant

Self-Cleaning Condenser Equipped Units

■ Self-Cleaning Condenser (Patented)

The accumulation of dust in the condenser can cause the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products inside. The Self-Cleaning Condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

■ Digital temperature control & monitor system

- Keep food products safe by maintaining constant temperatures.
- Alarms that sound when doors are not sealed shut; protect against food spoilage that originates from cold air leaks.
- Early Warning Alarm program detects issues before malfunction occurs.
- Digital display allows for easy monitoring.
- Programs interpret the condition of refrigeration systems by self-diagnosis.
- Rapid cool-down function (Turbo Cooling).
- Automatic evaporator fan motor delays.

■ Hydrocarbon refrigerants (R-600a)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

■ Energy conserving fan control

Utilizing algorithmic air circulation for optimal temperature levels, our innovative fan control system conserves energy by at least 15% and increases compressor life by up to 30%.

■ Double pane glass doors with Low-E glass

Energy saving double pane glass doors are equipped with Low-emissivity glass, which reduces outer heat gain and decreases energy consumption. It enhances energy efficiency and minimizes condensation. Lightweight door construction also reduces door maintenance and bushing wear, which in turn facilitates smoother door opening.

■ High-density polyurethane insulation

The entire cabinet structure is foamed-in-place using high density, HCFC free polyurethane insulation.

■ LED interior lighting

■ Refrigerator holds 33°F ~ 38°F for the best in food preservation



Maintenance free,
Self-Cleaning Condenser

TGM-15SDHW-N6

■ Standard features

- Anti-corrosion coated evaporator
- Door locks standard
- White and black color come standard
- Lead time applies

■ Optional features

- 4" dia. casters available -1/2" dia. & 13 TPI
- Price tag channel available

TGM SUPER DELUXE MODELS SPECIFICATIONS

ELECTRICAL DATA		TGM-15SDHW(B)-N6
Voltage		115/60/1
Plug Type		NEMA 5-15P
Full Load Amp.		2.1
Compressor HP		1/5
Cord Length (ft.)		7
Refrigerant		R-600a
DIMENSIONAL DATA		
Net Capacity (cu. ft.)		14.7
Ext. Dimension (L x D x H) (in.)		26 3/8 x 24 7/8 x 75 5/8 †
# of Doors		1
# of Shelves		4
Shelf Size (L x D) (in.)		21 x 17
Bottle Capacity (12oz.)		315 (378 w/add.shelf)
Net Weight (lbs.)		258
Gross Weight (lbs.)		281

Design and specifications subject to change without notice. Most updated spec sheets are available at www.turboairinc.com.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 2-1/4" for door handles. † Height does not include 1-3/4" for leg height.

■ WARRANTY: 3 Year Parts and Labor Warranty, Additional 4 Year Warranty on Compressor

JUMBO GLASS DOOR MERCHANDISERS NATURAL Refrigerant

Self-Cleaning Condenser Equipped Units

■ Self-Cleaning Condenser (Patented)

The accumulation of dust in the condenser can cause the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products inside. The Self-Cleaning Condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

■ Digital temperature control & monitor system

- Keep food products safe by maintaining constant temperatures.
- Alarms that sound when doors are not sealed shut; protect against food spoilage that originates from cold air leaks.
- Early Warning Alarm program detects issues before malfunction occurs.
- Digital display allows for easy monitoring.
- Programs interpret the condition of refrigeration systems by self-diagnosis.
- Rapid cool-down function (Turbo Cooling).
- Automatic evaporator fan motor delays.

■ Hydrocarbon refrigerants (R-290)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

■ Energy conserving fan control

Utilizing algorithmic air circulation for optimal temperature levels, our innovative fan control system conserves energy by at least 15% and increases compressor life by up to 30%.

■ Double pane glass doors with Low-E glass

Energy saving double pane glass doors are equipped with Low-emissivity glass, which reduces outer heat gain and decreases energy consumption. It enhances energy efficiency and minimizes condensation. Lightweight door construction also reduces door maintenance and bushing wear, which in turn facilitates smoother door opening.

■ High-density polyurethane insulation

The entire cabinet structure is foamed-in-place using high density, HCFC free polyurethane insulation.

■ Refrigerator holds 33°F ~ 38°F for the best in food preservation

■ Standard features

- White and black color come standard
- Lead time applies



Maintenance free,
Self-Cleaning Condenser

TJMR-55SDW-N

Benefits

- Loading capacity is the same as an endless remote unit
- No plumbing required
- No installation work required
- Low maintenance expenses
- Energy saving
- Easily movable

TJMR SUPER DELUXE MODELS SPECIFICATIONS

ELECTRICAL DATA	TJMR-30SDW(B)-N	TJMR-55SDW(B)-N	TJMR-85SDW(B)-N
Voltage	115/60/1	115/60/1	115/60/1
Plug Type	Ⓜ NEMA 5-15P	Ⓜ NEMA 5-15P	Ⓜ NEMA 5-15P
Full Load Amp.	3.0	6.4	7.5
Compressor HP	1/3	2/5	1/2
Cord Length (ft.)	8.5	8.5	8.5
Refrigerant	R-290	R-290	R-290
DIMENSIONAL DATA			
Net Capacity (cu. ft.)	30	55	85
Ext.Dimension (L x D x H) (in.)	36 ⁵ / ₈ x 38" x 83 [†]	65 ¹ / ₈ x 38" x 83 [†]	97 ¹ / ₂ x 38" x 83 [†]
# of Doors	1	2	3
# of Shelves	6	12	18
Shelf Size (L x D) (in.)	30 ¹ / ₄ x 29	29 x 29	29 x 29(L/R), 31 ¹ / ₄ x 29(M)
Bottle Capacity (12oz.)	1,008	1,848	4,704
Net Weight (lbs.)	347	476	761
Gross Weight (lbs.)	405	561	879

Design and specifications subject to change without notice. Most updated spec sheets are available at www.turboairinc.com.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 2-1/4" for door handles. † Height does not include 2-1/2" for leg height.

■ **WARRANTY: 3 Year Parts and Labor Warranty, Additional 4 Year Warranty on Compressor**

JUMBO GLASS DOOR FREEZERS NATURAL Refrigerant

Self-Cleaning Condenser Equipped Units

■ Self-Cleaning Condenser (Patented)

The accumulation of dust in the condenser can cause the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products inside. The Self-Cleaning Condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

■ Digital temperature control & monitor system

- Keep food products safe by maintaining constant temperatures.
- Alarms that sound when doors are not sealed shut; protect against food spoilage that originates from cold air leaks.
- Early Warning Alarm program detects issues before malfunction occurs.
- Digital display allows for easy monitoring.
- Programs interpret the condition of refrigeration systems by self-diagnosis.
- Rapid cool-down function (Turbo Freeze).
- Smart defrost system will defrost as needed.
- Automatic evaporator fan motor delays.

■ Hydrocarbon refrigerants (R-290)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

■ Energy conserving fan control

Utilizing algorithmic air circulation for optimal temperature levels, our innovative fan control system conserves energy by at least 15% and increases compressor life by up to 30%.

■ Individual two cycle refrigeration systems (TJMF-85SDW(B)-N only)

■ No electrical cabinet heater is needed

Turbo Air is the first in the industry to replace a frame heater with a method of using compressor-produced heat. This eliminates any unnecessary energy consumption while providing efficient freezing performance.

■ Triple pane heated glass doors

Equipped with unique triple-pane heated glass doors which enhance energy efficiency by preventing heat transfers and minimizing condensation. Lightweight door construction reduces door maintenance, bushing wear, and facilitates smooth door opening.

■ Freezer holds -10°F ~ 5°F for the best in frozen food preservation



Maintenance free,
Self-Cleaning Condenser

TJMF-55SDW-N

Benefits

- Loading capacity is the same as an endless remote unit
- No plumbing required
- No installation work required
- Low maintenance expenses
- Energy saving
- Easily movable

■ Standard features

- White and black color come standard
- Lead time applies

TJMF SUPER DELUXE MODELS SPECIFICATIONS

ELECTRICAL DATA	TJMF-30SDW(B)-N	TJMF-55SDW(B)-N	TJMF-85SDW(B)-N
Voltage	115/60/1	115/60/1	115/60/1
Plug Type	Ⓢ NEMA 5-15P	Ⓢ NEMA 5-20P	Ⓢ NEMA 5-20P
Full Load Amp.	7.1	9.4	15.7
Compressor HP	4/5	1	4/5 x 2
Cord Length (ft.)	8.5	8.5	8.5
Refrigerant	R-290	R-290	R-290
DIMENSIONAL DATA			
Net Capacity (cu. ft.)	30	55	85
Ext.Dimension (L x D x H) (in.)	36 5/8 x 38* x 83†	65 1/8 x 38* x 83†	97 1/2 x 38* x 83†
# of Doors	1	2	3
# of Shelves	6	12	18
Shelf Size (in.)	30 1/4 x 29	29 x 29	29 x 29(L/R), 31 1/4 x 29(M)
Net Weight (lbs.)	409	565	982
Gross Weight (lbs.)	468	649	1,098

Design and specifications subject to change without notice. Most updated spec sheets are available at www.turboairinc.com.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 2-1/4" for door handles. † Height does not include 2-1/2" for leg height.

■ **WARRANTY: 3 Year Parts and Labor Warranty, Additional 4 Year Warranty on Compressor**

JUMBO ICE MERCHANDISERS NATURAL Refrigerant

Self-Cleaning Condenser Equipped Units

Self-Cleaning Condenser (Patented)

The accumulation of dust in the condenser can cause the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products inside. The Self-Cleaning Condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

Digital temperature control & monitor system

- Keep food products safe by maintaining constant temperatures.
- Alarms that sound when doors are not sealed shut; protect against food spoilage that originates from cold air leaks.
- Digital display allows for easy monitoring.
- Programs interpret the condition of refrigeration systems by self-diagnosis.
- Rapid cool-down function (Turbo Freeze).
- Smart defrost system will defrost as needed.
- Automatic evaporator fan motor delays.

Hydrocarbon refrigerants (R-290)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

Ice stays frozen even in hot climates

Turbo Air ice merchandisers are based on a freezer system that is adjusted to the ideal temperature range for bagged ice storage, whereas our competitors use refrigerator based systems. This system maintains an avg. temperature of 12°F or lower, which eliminates the problem of ice melting during hot weather conditions.

Triple pane heated glass doors

Equipped with unique triple-pane heated glass doors which enhance energy efficiency by preventing heat transfers and minimizing condensation. Lightweight door construction reduces door maintenance, bushing wear, and facilitates smooth door opening.

No electrical cabinet heater is needed

Electrical heaters in freezers operate 24/7 in order to prevent water flow to the cabinet surface. This causes unnecessary energy consumption, and sometimes is the reason behind overheating. Instead of frame heaters, Turbo Air freezers harness the heat produced by the compressor during its condensing stage, eliminating any unnecessary energy consumption as well as providing the most efficient freezer performance available.



Maintenance free,
Self-Cleaning Condenser

TJMI-55SDW-N

Benefits

- Loading capacity is the same as an endless remote unit
- No plumbing required
- No installation work required
- Low maintenance expenses
- Energy saving
- Easily movable

Freezer holds 10°F ~ 15°F for the best in bagged ice storage

Standard feature

- White and black color comes standard
- Lead time applies

TJMI MODELS SPECIFICATIONS

ELECTRICAL DATA	TJMI-30SDW(B)-N	TJMI-55SDW(B)-N
Voltage	115/60/1	115/60/1
Plug Type	Ⓢ NEMA 5-15P	Ⓢ NEMA 5-15P
Full Load Amp.	6.2	7.0
Compressor HP	3/5	4/5
Cord Length (ft.)	8.5	8.5
Refrigerant	R-290	R-290
DIMENSIONAL DATA		
Net Capacity (cu. ft.)	30	55
Ext. Dimension (L x D x H) (in.)	36 5/8 x 38" x 83†	65 1/8 x 38" x 83†
# of Doors	1	2
# of Shelves (Rack/Bottom)	3 (2/1)	6 (4/2)
Bottom Shelf Size (L x D) (in.)	29 1/2 x 27	28 5/8 x 28 3/8
Net Weight (lbs.)	368	556
Gross Weight (lbs.)	392	732

Design and specifications subject to change without notice. Most updated spec sheets are available at www.turboairinc.com.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 2-1/4" for door handles. † Height does not include 2-1/2" for leg height.

WARRANTY: 3 Year Parts and Labor Warranty, Additional 4 Year Warranty on Compressor



DISPLAY MERCHANDISERS

BEAUTY & BEAST®


Modern design to enhance impulsive sales
and LED lighting for high product visibility

Eco-friendly hydrocarbon refrigerants

Simple plug-in installation,
no plumbing required



Patented, Maintenance free
Self-Cleaning Condenser
only at Turbo Air



Let's Watch Turbo Air's
Self-Cleaning Condenser Video!

www.turboairinc.com

Refrigeration Reinvented **Turbo air** REFRIGERATOR MANUFACTURER

Display Merchandisers



Open Display Merchandisers

Horizontal Cases

Vertical Air Curtains

Medium / Full Size Height

Island Display Cases

Bakery & Deli Display Cases

European Straight Front Bakery Dry Cases

HORIZONTAL OPEN DISPLAY CASES NATURAL Refrigerant

Self-Cleaning Condenser Equipped Units

■ Self-Cleaning Condenser (Patented)

The accumulation of dust in the condenser can cause the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products inside. The Self-Cleaning Condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

■ Hydrocarbon refrigerants (R-290)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerants designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

■ Digital temperature controller

■ LED interior lighting under each shelf

■ Tempered glass shelves standard (Cantilever type)

■ Modern design

Exterior top and bottom have a mirror finish with glass side walls. Bottom side panels foamed with polyurethane, high-density cell insulation (CFC free).

■ Bottom glass shelf and stainless steel back wall with a mirror finish

■ Standard back-guard improves airflow


■ Foamed with polyurethane, high-density cell insulation (CFC free)

■ Perforated interior back wall and top for improved airflow

■ Front air intake and rear air discharge

■ Standard features

- Simple plug-in installation
- No plumbing required
- White and black color come standard
- Digital electronic thermostat with defrost control
- Energy saving night curtain
- 3" dia. swivel casters with locks on the front set
- White and black color come standard

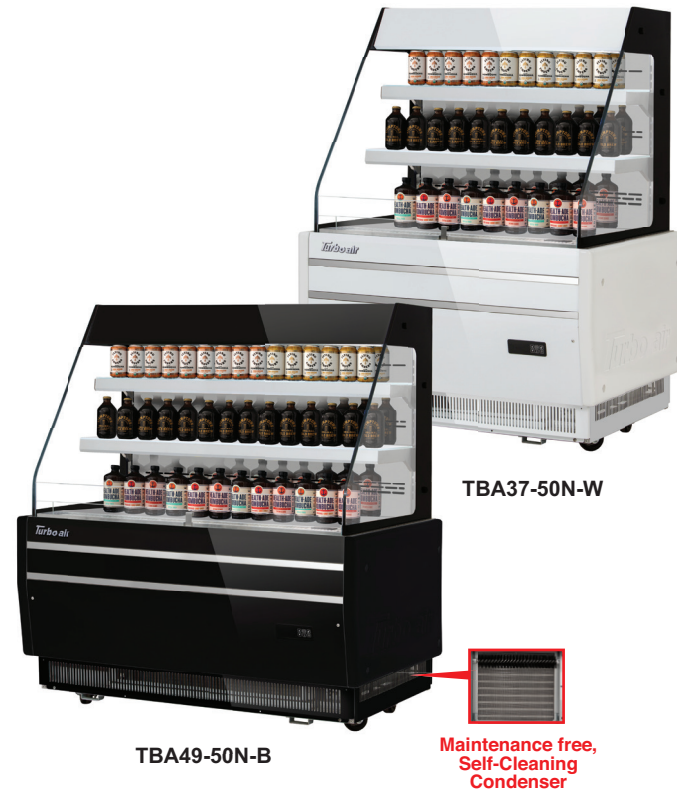

■ Optional features

- Price tag channel available
- Lead time applies

- Recommended operating conditions

TBA models are designed to operate in an environment where temperature & humidity do not exceed 75°F and 55% respectively. Units should not be installed near HVAC vents, fans or doorways that will disrupt the air curtain and compromise the function of the cabinet. Air curtain models will run most efficiently when completely loaded with product.

TBA MODELS SPECIFICATIONS

ELECTRICAL DATA	TBA37-50N-W(B)	TBA49-50N-W(B)
Voltage	115/60/1	115/60/1
Plug Type	ⓘ NEMA 5-15P	ⓘ NEMA 5-15P
Full Load Amp.	5.9	6.9
Compressor HP	3/4	3/4
Refrigerant	R-290	R-290
DIMENSIONAL DATA		
Net Capacity (cu. ft.)	4.2	5.7
Ext. Dimensions (L x D x H) (in.)	37 x 28 x 48 ^{5/8} †	48 ^{7/8} x 28 x 48 ^{5/8} †
# of Shelves	2	2
Shelf Size (L x D) (in.)	32 ^{3/8} x 8 ^{3/4} , 32 ^{3/8} x 12 ^{5/8}	44 ^{1/8} x 8 ^{3/4} , 44 ^{1/8} x 12 ^{5/8}
Net Weight (lbs.)	300	360
Gross Weight (lbs.)	450	550

Design and specifications subject to change without notice. Most updated spec sheets are available at www.turboairinc.com.

Actual shipping weight may differ due to extra packing materials for product protection.

† Height does not include 2-1/4" for caster height.

■ WARRANTY: 2 Year Parts and Labor Warranty, Additional 3 Year Warranty on Compressor

VERTICAL AIR CURTAINS NATURAL Refrigerant

Self-Cleaning Condenser Equipped Units

■ Self-Cleaning Condenser (Patented)

The accumulation of dust in the condenser can cause the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products inside. The Self-Cleaning Condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

■ Hydrocarbon refrigerants (R-290)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

■ Modern design

By harmonizing curvature and rigidity, our modern style product designs are user-friendly while maintaining the highest product visibility and aesthetics. The glass front shield optimize the merchandiser's display effects of fresh salads, sandwiches, desserts and beverages.

■ Designed to enhance impulsive sales

Ideal for eye-catching displays and convenient access with fast service in high traffic area.

■ White coated galvanized steel interior

■ White coated galvanized steel solid shelves

■ Energy saving night curtain standard

■ Standard back-guard improves airflow

■ Foamed with polyurethane, high-density cell insulation (CFC free)

■ Perforated interior back wall and top for improved airflow

■ Front air intake and rear air discharge

■ LED interior lighting under each shelf

■ LED advertising panel



Maintenance free,
Self-Cleaning Condenser

TOM-50SEB-N

■ Standard features

- Simple plug-in installation
- Patented self-contained system, no plumbing required
- Solar powered digital thermometer
- Digital electronic thermostat with defrost control
- White and black color come standard

■ Optional features

- Price tag channel available
- Security cover available
- Leveling leg available
- Casters available

- Recommended operating conditions

TOM models are designed to operate in an environment where temperature & humidity do not exceed 75°F and 55% respectively. Units should not be installed near HVAC vents, fans or doorways that will disrupt the air curtain and compromise the function of the cabinet. Air curtain models will run most efficiently when completely loaded with product.

TOM-SE MODELS SPECIFICATIONS

ELECTRICAL DATA	TOM-40SEW(B)-N	TOM-50SEW(B)-N	TOM-60SEW(B)-N	TOM-72SEW(B)-N	TOM-96SEW(B)-N
Voltage	115/60/1	115/60/1	115/60/1	220/60/1	220/60/1
Plug Type	Ⓜ NEMA 5-20P	Ⓜ NEMA 5-20P	Ⓜ NEMA 5-20P	Ⓜ NEMA 6-20P	Ⓜ NEMA 6-20P
Full Load Amp.	15.5	15.5	15.5	18	18
Compressor HP	3/4 x 2	3/4 x 2	3/4 x 2	3/4 x 4	3/4 x 4
Refrigerant	R-290	R-290	R-290	R-290	R-290
DIMENSIONAL DATA					
Net Capacity (cu. ft.)	16.1	21.3	26.5	32.2	42.6
Ext. Dimension (L x D x H) (in.)	39 ⁷ / ₈ x 25 ³ / ₄ x 80 ¹ / ₄ *	51 ⁵ / ₈ x 25 ³ / ₄ x 80 ¹ / ₄ *	63 ¹ / ₂ x 25 ³ / ₄ x 80 ¹ / ₄ *	76 ¹ / ₂ x 25 ³ / ₄ x 80 ¹ / ₄ *	100 ¹ / ₈ x 25 ³ / ₄ x 80 ¹ / ₄ *
# of Shelves	4	4	4	8	8
Shelf Size (in.)	36 ¹ / ₂ x 12	48 ¹ / ₄ x 12	60 ¹ / ₈ x 12	36 ¹ / ₂ x 12	48 ¹ / ₄ x 12
Net Weight (lbs.)	512	590	668	980	1,136
Gross Weight (lbs.)	642	733	824	1,220	1,402

Design and specifications subject to change without notice. Most updated spec sheets are available at www.turboairinc.com.

Actual shipping weight may differ due to extra packing materials for product protection.

* Height does not include 5/8" for bolt height.

■ WARRANTY: 2 Year Parts and Labor Warranty, Additional 3 Year Warranty on Compressor

VERTICAL AIR CURTAINS NATURAL Refrigerant

Self-Cleaning Condenser Equipped Units

■ Self-Cleaning Condenser (Patented)

The accumulation of dust in the condenser can cause the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products inside. The Self-Cleaning Condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

■ Hydrocarbon refrigerants (R-290)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

■ Modern design

By harmonizing curvature and rigidity, our modern style product designs are user-friendly while maintaining the highest product visibility and aesthetics. The glass front shield optimize the merchandiser's display effects of fresh salads, sandwiches, desserts and beverages.

■ Designed to enhance impulsive sales

Ideal for eye-catching displays and convenient access with fast service in high traffic area.

■ White coated galvanized steel interior

■ White coated galvanized steel solid shelves

■ Energy saving night curtain standard

■ Standard back-guard improves airflow

■ Foamed with polyurethane, high-density cell insulation (CFC free)

■ Perforated interior back wall and top for improved airflow

■ Front air intake and rear air discharge

■ LED interior lighting under each shelf

■ LED advertising panel



Maintenance free,
Self-Cleaning Condenser

TOM-50MSEW-N

■ Standard features

- Simple plug-in installation
- Patented self-contained system, no plumbing required
- Solar powered digital thermometer
- Digital electronic thermostat with defrost control
- White and black color come standard

■ Optional features

- Price tag channel available
- Security cover available
- Leveling leg available
- Casters available

- Recommended operating conditions

TOM models are designed to operate in an environment where temperature & humidity do not exceed 75°F and 55% respectively. Units should not be installed near HVAC vents, fans or doorways that will disrupt the air curtain and compromise the function of the cabinet. Air curtain models will run most efficiently when completely loaded with product.

TOM-MSE MODELS SPECIFICATIONS

ELECTRICAL DATA		TOM-25MSEW(B)-N	TOM-40MSEW(B)-N	TOM-50MSEW(B)-N	TOM-60MSEW(B)-N	TOM-75MSEW(B)-N
Voltage		115/60/1	115/60/1	115/60/1	115/60/1	220/60/1
Plug Type		Ⓢ NEMA 5-15P	Ⓢ NEMA 5-20P	Ⓢ NEMA 5-20P	Ⓢ NEMA 5-20P	Ⓢ NEMA 6-20P
Full Load Amp.		8	15.5	15.5	15.5	18
Compressor HP		3/4	3/4 x 2	3/4 x 2	3/4 x 2	3/4 x 4
Refrigerant		R-290	R-290	R-290	R-290	R-290
DIMENSIONAL DATA						
Net Capacity (cu. ft.)		7.0	10.4	13.8	17.2	20.9
Ext. Dimension (L x D x H) (in.)		28 x 25 3/4 x 60 3/4*	39 7/8 x 25 3/4 x 60 3/4*	51 5/8 x 25 3/4 x 60 3/4*	63 1/2 x 25 3/4 x 60 3/4*	76 1/2 x 25 3/4 x 60 3/4*
# of Shelves		3	3	3	3	6
Shelf Size	(Top) (L x D) (in.)	24 5/8 x 10 3/4	36 1/2 x 10 3/4	48 1/4 x 10 3/4	60 1/8 x 10 3/4	36 1/2 x 10 3/4
	(Middle) (L x D) (in.)	24 5/8 x 12	36 1/2 x 12	48 1/4 x 12	60 1/8 x 12	36 1/2 x 12
	(Lower) (L x D) (in.)	24 5/8 x 12	36 1/2 x 12	48 1/4 x 12	60 1/8 x 12	36 1/2 x 12
Net Weight (lbs.)		359	421	463	505	812
Gross Weight (lbs.)		461	521	567	607	992

Design and specifications subject to change without notice. Most updated spec sheets are available at www.turboairinc.com.

Actual shipping weight may differ due to extra packing materials for product protection.

* Height does not include 5/8" for bolt height.

■ WARRANTY: 2 Year Parts and Labor Warranty, Additional 3 Year Warranty on Compressor

ISLAND DISPLAY CASES NATURAL Refrigerant

Self-Cleaning Condenser Equipped Units

■ Self-Cleaning Condenser (Patented)

The accumulation of dust in the condenser causes the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products in refrigerators. The Self-Cleaning Condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

■ Hydrocarbon refrigerant (R-290)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

■ Modern design

By harmonizing curvature and rigidity, our modern style product designs are user-friendly while maintaining the highest product visibility and aesthetics. The glass front shield optimize the merchandiser's display effects of fresh salads, sandwiches, desserts and beverages.

■ Designed to enhance impulsive sales

Ideal for eye-catching displays and convenient access with fast service in high traffic area.

■ LED lighting on top panel and canopy

Brighter and longer lasting LED lights provide attractive, enhanced illumination compared to fluorescents. It saves energy by producing less heat, while maximizing the visibility in the display area.

■ Tempered glass product stopper

■ Simple plug-in installation

■ Patented self-contained system, no plumbing required


■ Digital electronic thermostat with defrost control

■ Standard features

- Standard color comes in black only
- Price tag rails standard
- Lead time applies

■ Optional features

- Leveling leg available
- Casters available

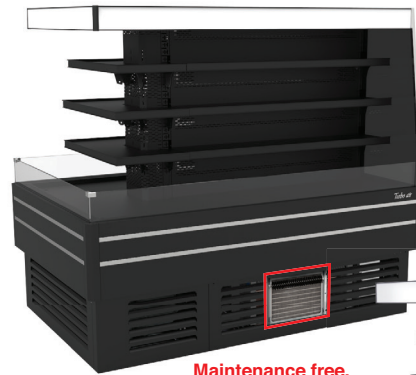


Maintenance free,
Self-Cleaning Condenser

TIOM-48CSB-N



TIOM-48CCB-N

Shape References

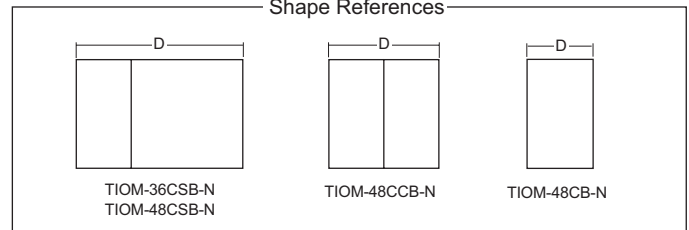

■ Recommended operating conditions

TIOM models are designed to operate in an environment where temperature & humidity do not exceed 75°F and 55% respectively. Units should not be installed near HVAC vents, fans or doorways that will disrupt the air curtain and compromise the function of the cabinet. Air curtain models will run most efficiently when completely loaded with product.

TIOM MODELS SPECIFICATIONS

ELECTRICAL DATA	TIOM-48CB-N	TIOM-48CCB-N	TIOM-36CSB-N	TIOM-48CSB-N
Voltage	220/60/1	220/60/1	220/60/1	220/60/1
Plug Type	☺ NEMA L6-20P	☺ NEMA L6-20P	☺ NEMA L6-20P	☺ NEMA L6-20P
Full Load Amp.	7.74	15.48	16.43	16.43
Compressor HP	3/4 x 2	3/4 x 4	3/4 x 4	3/4 x 4
Refrigerant	R-290	R-290	R-290	R-290
DIMENSIONAL DATA				
Net Capacity (cu. ft.)	11.9	23.7	30.1	36.0
Ext. Dimension (L x D x H) (in.)	47 1/8 x 25 3/4 x 64 1/2*	47 1/8 x 48 3/8 x 64 1/2*	47 1/8 x 62 x 64 1/2*	47 1/8 x 73 7/8 x 64 1/2*
# of Tiers	3	3	3	3
Net Weight (lbs.)	397	706	816	904
Gross Weight (lbs.)	562	853	1,225	1,333

Design and specifications subject to change without notice. Most updated spec sheets are available at www.turboairinc.com.

Actual shipping weight may differ due to extra packing materials for product protection.

* Height does not include 5/8" for bolt height.

■ WARRANTY: 2 Year Parts and Labor Warranty, Additional 3 Year Warranty on Compressor

ISLAND DISPLAY CASES NATURAL Refrigerant

Self-Cleaning Condenser Equipped Units

■ Self-Cleaning Condenser (Patented)

The accumulation of dust in the condenser causes the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products in refrigerators. The Self-Cleaning Condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

■ Hydrocarbon refrigerant (R-290)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

■ Modern design

By harmonizing curvature and rigidity, our modern style product designs are user-friendly while maintaining the highest product visibility and aesthetics. The glass front shield optimize the merchandiser's display effects of fresh salads, sandwiches, desserts and beverages.

■ Designed to enhance impulsive sales

Ideal for eye-catching displays and convenient access with fast service in high traffic area.

■ LED lighting on top panel and canopy

Brighter and longer lasting LED lights provide attractive, enhanced illumination compared to fluorescents. It saves energy by producing less heat, while maximizing the visibility in the display area.

■ Tempered glass product stopper

■ Simple plug-in installation

■ Patented self-contained system, no plumbing required

■ Digital electronic thermostat with defrost control

■ Standard features

- Standard color comes in black only
- Price tag rails standard
- Lead time applies

■ Optional features


- Leveling leg available
- Casters available



Maintenance free,
Self-Cleaning Condenser

TIOM-20CSCB-N

Shape References

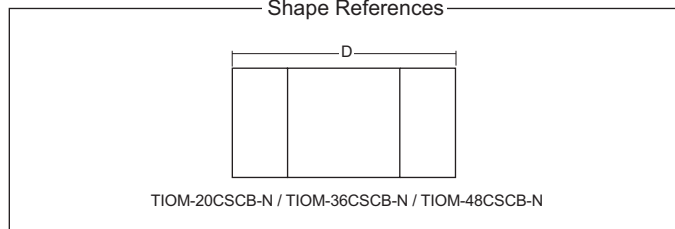

TIOM-20CSCB-N / TIOM-36CSCB-N / TIOM-48CSCB-N

■ Recommended operating conditions

TIOM models are designed to operate in an environment where temperature & humidity do not exceed 75°F and 55% respectively. Units should not be installed near HVAC vents, fans or doorways that will disrupt the air curtain and compromise the function of the cabinet. Air curtain models will run most efficiently when completely loaded with product.

TIOM MODELS SPECIFICATIONS

ELECTRICAL DATA	TIOM-20CSCB-N	TIOM-36CSCB-N	TIOM-48CSCB-N
Voltage	220/60/1	220/60/1	220/60/1
Plug Type	Ⓢ NEMA L6-30P	Ⓢ NEMA L6-30P	Ⓢ NEMA L6-30P
Full Load Amp.	24.17	24.17	24.17
Compressor HP	3/4 x 6	3/4 x 6	3/4 x 6
Refrigerant	R-290	R-290	R-290
DIMENSIONAL DATA			
Net Capacity (cu. ft.)	35.8	41.9	47.9
Ext. Dimension (L x D x H) (in.)	47 1/8 x 72 3/8 x 64 1/2*	47 1/8 x 84 5/8 x 64 1/2*	47 1/8 x 96 1/2 x 64 1/2*
# of Tiers	3	3	3
Net Weight (lbs.)	938	1,125	1,212
Gross Weight (lbs.)	1,230	1,512	1,642

Design and specifications subject to change without notice. Most updated spec sheets are available at www.turboairinc.com.

Actual shipping weight may differ due to extra packing materials for product protection.

* Height does not include 5/8" for bolt height.

■ WARRANTY: 2 Year Parts and Labor Warranty, Additional 3 Year Warranty on Compressor

EUROPEAN STRAIGHT DISPLAY CASES

■ Attractive, elegant, glass sided Euro design

Straight tempered front glass and minimal frame provide full product visibility to optimize display effects. Its elegant contemporary euro design and luxurious colored case will not only enhance any store atmosphere but also will keep product presentation at its best and most beautiful.

■ High-density polyurethane insulation

The entire cabinet structure is foamed-in-place using high density, CFC free polyurethane insulation.

■ LED interior lighting under each shelf

■ Low-E coated double pane glass is tempered for safety

■ Adjustable, tempered glass shelves with stainless steel front and back edges

■ Stainless steel floor

■ Sliding rear doors for product loading & unloading

■ Stainless steel color option available

■ Standard features

- White and black colors come standard



TCGB-48UF-DR-S



Maintenance free,
Self-Cleaning Condenser

TCGB-72UF-DR-B

TCGB MODELS SPECIFICATIONS

ELECTRICAL DATA	TCGB-36UF-DR-W(B, S)	TCGB-48UF-DR-W(B, S)	TCGB-60UF-DR-W(B, S)	TCGB-72UF-DR-W(B, S)
Voltage	115/60/1	115/60/1	115/60/1	115/60/1
Plug Type	Ⓜ NEMA 5-15P	Ⓜ NEMA 5-15P	Ⓜ NEMA 5-15P	Ⓜ NEMA 5-15P
Full Load Amp.	0.4	0.6	0.7	0.7
Net Capacity (cu. ft.)	11.8	15.6	19.4	23.2
Ext. Dimension (L x D x H) (in.)	36 1/2 x 33 1/8 x 50 1/8*	48 1/2 x 33 1/8 x 50 1/8*	60 1/2 x 33 1/8 x 50 1/8*	72 1/2 x 33 1/8 x 50 1/8*
# of Shelves	2	2	2	2
Shelf Size (L x D) (in.)	32 3/8 x 16 3/4, 32 3/8 x 18 3/4	44 1/4 x 16 3/4, 44 1/4 x 18 3/4	56 1/4 x 16 3/4, 56 1/4 x 18 3/4	68 1/4 x 16 3/4, 68 1/4 x 18 3/4
Net Weight (lbs.)	351	459	507	622
Gross Weight (lbs.)	471	564	677	780

Design and specifications subject to change without notice. Most updated spec sheets are available at www.turboairinc.com.

Actual shipping weight may differ due to extra packing materials for product protection.

* Height does not include 5/8" for bolt height.

■ WARRANTY: 2 Year Parts and Labor Warranty, Additional 3 Year Warranty on Compressor



Digital Type Underbar Equipment

- Self-Cleaning Condenser
- LED Interior Lighting (Back Bars)
- Digital Temperature Controller (except 1 door models)
- Forced air cooling system
- Hydrocarbon Refrigerants (R-290/R-600a)
- Stainless steel cabinet construction
- CFC Free Polyurethane insulation
- Heavy duty, PE coated dividers
- Double pane glass doors with Low-E glass (Back Bars - SGD models only)
- 3 years parts and labor warranty, additional 4 years warranty on compressor



Underbar Equipment



Beer Dispensers
Club Top Beer Dispensers
Back Bars
Narrow Back Bars

BEER DISPENSERS NATURAL Refrigerant

Self-Cleaning Condenser Equipped Units

■ Self-Cleaning Condenser (Patented)

The accumulation of dust in the condenser can cause the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products inside. The Self-Cleaning Condenser device keeps the condenser clean and prevents system failure by automatically brushing daily (except TBD-1SDD/1SBD-N6).

■ Hydrocarbon refrigerants (R-290 / R-600a)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

■ Digital Temperature Controller

External digital temperature control has an easily accessible panel to quickly adjust temperatures, which includes a defrost control (except TBD-1SDD/SBD-N6).

■ Forced air cooling system

Fast cooling and balanced temperature throughout the cabinet.

■ Stainless steel cabinet construction

Super Deluxe (SD) models boast a stainless steel exterior (except galvanized steel back and bottom). SB models have an attractive wear-resistant black vinyl exterior. Heavy gauge stainless steel countertop is perfect for sanitation and durability. The interior is stainless steel except galvanized steel top. Spacious inside construction with 32" (31 1/4" for TBD-1SDD/SBD-N6) inner height accommodates various sizes of beer kegs. Turbo Air beer dispenser model guarantees the utmost in cleanliness and long product life. It also adds a touch of style to the most refined setting.

■ High-density polyurethane insulation

The entire cabinet structure is foamed-in-place using high density, HCFC free polyurethane insulation.

■ 3" diameter stainless steel insulated beer towers

■ Ergonomically designed doors

Customers' fatigue fades away with easy grip handles and doors that open effortlessly. These features along with self-closing doors make this the ultimate choice in customer convenience.

■ Side mount compressor unit

With compressors positioned on the side of the unit, our refrigerators can now be serviced without being moved. Our innovative, front breathing feature also allows this model to be highly efficient in narrow spaces.



■ Comes standard with a two-way (TBD-1SDD/SBD-N6) & a four-way (TBD-2SDD/SBD-N6, TBB-3,4SDD/SBD-N) taper manifold

■ Beer dispenser holds 33°F ~ 38°F for optimal beverage preservation

■ Standard features

- Anti-corrosion coated evaporator
- Double faucet beer tower standard
- Door locks standard
- Self-contained system
- 4" dia. swivel casters standard

■ Optional features

- 2" dia. casters available (except TBD-1SDD/SBD-N6)
- 6" height adjustable legs available
- Triple faucet beer tower available

TBD MODELS SPECIFICATIONS

ELECTRICAL DATA	TBD-1SDD/SBD-N6	TBD-2SDD/SBD-N6	TBD-3SDD/SBD-N	TBD-4SDD/SBD-N
Voltage	115/60/1	115/60/1	115/60/1	115/60/1
Plug Type	Ⓜ NEMA 5-15P	Ⓜ NEMA 5-15P	Ⓜ NEMA 5-15P	Ⓜ NEMA 5-15P
Full Load Amp.	1.1	1.9	2.5	2.7
Compressor HP	1/8	1/5	1/3	1/3
Refrigerant	R-600a	R-600a	R-290	R-290
Cord Length (ft.)	8.5	8.5	8.5	8.5
DIMENSIONAL DATA				
Capacity (1/2 Barrels)	1	2	2	2
Net Capacity	7.76	20.9	25.4	36.47
Ext. Dimension (L x D x H) (in.)	23 5/8 x 29 3/4* x 34 1/2†	58 3/4 x 27 1/4* x 37 1/8†	69 x 27 1/4* x 37 1/8†	90 3/8 x 27 1/4* x 37 1/8†
# of Swing Door	1	2	3	4
# of Casters	4	6	6	6
Net Weight (lbs.)	175	286	298	420
Gross Weight (lbs.)	185	298	320	443

Design and specifications subject to change without notice. Most updated spec sheets are available at www.turboairinc.com.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 4" for door handles & rear spacers. † Height does not include 5" for caster height. Height does not include 15-1/8" for draft arm.

■ **WARRANTY: 3 Year Parts and Labor Warranty, Additional 4 Year Warranty on Compressor**

CLUB TOP BEER DISPENSERS

NATURAL
 Refrigerant

Self-Cleaning Condenser Equipped Units

■ Self-Cleaning Condenser (Patented)

The accumulation of dust in the condenser can cause the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products inside. The Self-Cleaning Condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

■ Hydrocarbon refrigerants (R-290 / R-600a)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

■ Digital Temperature Controller

External digital temperature control has an easily accessible panel to quickly adjust temperatures, which includes a defrost control.

■ Forced air cooling system

Fast cooling and balanced temperature throughout the cabinet.

■ Stainless steel cabinet construction

Super Deluxe (SD) models boast a stainless steel exterior (except galvanized steel back and bottom). SB models have an attractive wear-resistant black vinyl exterior. Heavy gauge stainless steel countertop and club top lids are perfect for sanitation and durability. The interior is stainless steel except galvanized steel top. Spacious inside construction with 32" inner height accommodates various sizes of beer kegs. Turbo Air Club Top model guarantees the utmost in cleanliness and long product life. It also adds a touch of style to the most refined setting.

■ High-density polyurethane insulation

The entire cabinet structure is foamed-in-place using high density, HCFC free polyurethane insulation.

■ 3" diameter stainless steel insulated beer towers

■ Comes standard with a four-way taper manifold

■ Club top (TCB) models provide easy access to the interior area

Club Top is a combined functional cabinet of direct draw cold beer dispenser and glass chiller. This convenient model provides easy access to interior storage area of the refrigerator for chilled beer glasses.

■ Ergonomically designed doors

Customers' fatigue fades away with easy grip handles and doors that open effortlessly. These features along with self-closing doors make this the ultimate choice in customer convenience.



TCB-4SDD-N

TCB-2SBD-N6

 Maintenance free,
 Self-Cleaning Condenser

■ Easy to glide stainless steel club top lids

■ Side mount compressor unit

With compressors positioned on the side of the unit, our refrigerators can now be serviced without being moved. Our innovative, front breathing feature also allows this model to be highly efficient in narrow spaces.

■ Club top beer dispenser holds 33°F ~ 38°F for optimal beverage preservation

■ Standard features

- Anti-corrosion coated evaporator
- Double faucet beer tower standard
- Door locks standard
- Self-contained system
- 4" dia. swivel casters standard

■ Optional features

- 2" dia. casters available
- 6" height adjustable legs available
- Triple faucet beer tower available

TCB MODELS SPECIFICATIONS

ELECTRICAL DATA	TCB-2SDD/SBD-N6	TCB-3SDD/SBD-N6	TCB-4SDD/SBD-N
Voltage	115/60/1	115/60/1	115/60/1
Plug Type	Ⓜ NEMA 5-15P	Ⓜ NEMA 5-15P	Ⓜ NEMA 5-15P
Full Load Amp.	1.3	2.3	2.6
Compressor HP	1/5	1/5	1/3
Refrigerant	R-600a	R-600a	R-290
Cord Length (ft.)	8.5	8.5	8.5
DIMENSIONAL DATA			
Capacity (1/2 Barrels)	2	3	4
Net Capacity	20.9	25.4	36.47
Ext. Dimension (L x D x H) (in.)	58 7/8 x 27 1/4* x 38 5/8 †	69 1/8 x 27 1/4* x 38 5/8 †	90 3/8 x 27 1/4* x 38 5/8 †
# of Swing Door	2	2	3
# of Casters	6	6	6
Net Weight (lbs.)	335	355	425
Gross Weight (lbs.)	357	378	448

Design and specifications subject to change without notice. Most updated spec sheets are available at www.turboairinc.com.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 4" for door handles & rear spacers. † Height does not include 5" for caster height. Height does not include 15-1/8" for draft arm.

■ WARRANTY: 3 Year Parts and Labor Warranty, Additional 4 Year Warranty on Compressor

BACK BARS NATURAL Refrigerant

Self-Cleaning Condenser Equipped Units

Self-Cleaning Condenser (Patented)

The accumulation of dust in the condenser can cause the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products inside. The Self-Cleaning Condenser device keeps the condenser clean and prevents system failure by automatically brushing daily (except TBB-1SBD-N6).

Hydrocarbon refrigerants (R-290 / R-600a)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

Digital Temperature Controller

External digital temperature control has an easily accessible panel to quickly adjust temperatures, which includes a defrost control (except TBB-1SBD-N6).

LED interior lighting

Forced air cooling system

Fast cooling and balanced temperature throughout the cabinet.

Stainless steel countertop and interior

The exterior of the cabinet is constructed with heavy gauge reinforced stainless steel countertop and wear-resistant black vinyl coated galvanized steel. The interior is painted galvanized steel with reinforced stainless steel floor. Turbo Air Back Bar model guarantees the utmost in cleanliness and long product life. It also adds a touch of style to the most refined setting.

Ergonomically designed doors

Customers' fatigue fades away with easy grip handles and doors that open effortlessly. These features along with self-closing doors make this the ultimate choice in customer convenience.

Double pane glass doors with Low-E glass (SGD Models)

High-density polyurethane insulation

The entire cabinet structure is foamed-in-place using high density, HCFC free polyurethane insulation.



TBB-2SBD-N6

TBB-3SGD-N

Maintenance free,
Self-Cleaning Condenser

Adjustable, heavy duty, PE (polyethylene) coated wire shelves

Side mount compressor unit

With compressors positioned on the side of the unit, our refrigerators can now be serviced without being moved. Our innovative, front breathing feature also allows this model to be highly efficient in narrow spaces.

Refrigerator holds 33°F ~ 38°F for optimal beverage preservation

Standard features

- Anti-corrosion coated evaporator
- Self-contained system
- 4" dia. swivel casters standard
- Door locks standard

Optional features

- 2" dia. casters available (except TBB-1SBD-N6)
- 6" height adjustable legs available

TBB MODELS SPECIFICATIONS

ELECTRICAL DATA	TBB-1SBD-N6	TBB-2SGD-N/SBD-N6	TBB-3SGD-N/SBD-N6	TBB-4SGD/SBD-N
Voltage	115/60/1	115/60/1	115/60/1	115/60/1
Plug Type	① NEMA 5-15P	① NEMA 5-15P	① NEMA 5-15P	① NEMA 5-15P
Full Load Amp.	1.3	2.8(SGD) / 1.7(SBD)	2.8(SGD) / 1.9(SBD)	3.6(SGD) / 2.9(SBD)
Compressor HP	1/8	1/3(SGD) / 1/5(SBD)	1/3(SGD) / 1/5(SBD)	1/3
Refrigerant	R-600a	R-290(SGD) / R-600a(SBD)	R-290(SGD) / R-600a(SBD)	R-290
Cord Length (ft.)	8.5	8.5	8.5	8.5
Lamp (w)	6.5	12.5	16.5	12.5 x 2ea
DIMENSIONAL DATA				
Capacity (1/2 Barrels)	1	2	3	4
Capacity (cu.ft.)	7.76	19	23	36.47
Ext. Dimension (L x D x H) (in.)	23 ⁵ / ₈ x 29 ³ / ₄ x 34 ¹ / ₂ †	58 ³ / ₄ x 27 ¹ / ₄ x 37 ¹ / ₈ †	69 x 27 ¹ / ₄ x 37 ¹ / ₈ †	90 ³ / ₈ x 27 ¹ / ₄ x 37 ¹ / ₈ †
# of Swing Door	1	2	2	3
# of Shelves (Sub Shelves)	2 (-)	4 (2)	4 (2)	6 (2)
Shelf Size (L x D) (in.)	18 ¹ / ₂ x 19 ¹ / ₂	24 ³ / ₈ x 19 ³ / ₈ (L), 20 x 19 ³ / ₈ (R)	29 ¹ / ₄ x 19 ³ / ₈ (L), 25 x 19 ³ / ₈ (R)	26 ¹ / ₂ x 19 ³ / ₈ (L), 25 ³ / ₄ x 19 ³ / ₈ (M), 22 ¹ / ₄ x 19 ³ / ₈ (R)
# of Casters	4	6	6	6
Net Weight (lbs.)	190	276(SGD) / 286(SBD)	298(SGD) / 308(SBD)	435(SGD) / 442(SBD)
Gross Weight (lbs.)	212	331(SGD) / 298(SBD)	375(SGD) / 320(SBD)	545(SGD) / 479(SBD)

Design and specifications subject to change without notice. Most updated spec sheets are available at www.turboairinc.com.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 2"(SGD) / 1-3/8"(SBD) for door handles. Depth does not include 2" for rear spacers. † Height does not include 5" for caster height.

WARRANTY: 3 Year Parts and Labor Warranty, Additional 4 Year Warranty on Compressor

NARROW BACK BARS NATURAL Refrigerant

■ Equipped with easy-to-clean Air Filter

The accumulation of dust in the condenser causes failures or breakdowns in refrigeration. Refrigeration operate normally until they accumulate a certain amount of dust. When they reach their limit, performance will drop rapidly, resulting in damages and possible disposal of stored goods. This is why all refrigeration manufacturers require the condenser to be cleaned at least once a month for warranty to remain valid. With Turbo Air, this process is simple and easy due to the frontal access air filter device. Pull out the filter and vacuum lightly to remove the dust. Place it back into position when complete.

■ Hydrocarbon refrigerants (R-290 / R-600a)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

■ Digital Temperature Controller

External digital temperature control has an easily accessible panel to quickly adjust temperatures, which includes a defrost control.

■ LED interior lighting

■ Forced air cooling system

Fast cooling and balanced temperature throughout the cabinet.

■ Stainless steel countertop and interior

The exterior of the cabinet is constructed with heavy gauge reinforced stainless steel countertop and wear-resistant black vinyl coated galvanized steel. The interior is stainless steel except galvanized steel top. Turbo Air Back Bar model guarantees the utmost in cleanliness and long product life. It also adds a touch of style to the most refined setting.

■ Ergonomically designed doors

Customers' fatigue fades away with easy grip handles and doors that open effortlessly. These features along with self-closing doors make this the ultimate choice in customer convenience.

■ Double pane glass doors with Low-E glass (SGD Models)

■ High-density polyurethane insulation

The entire cabinet structure is foamed-in-place using high density, HCFC free polyurethane insulation.

■ Adjustable, heavy duty, PE (polyethylene) coated wire shelves



TBB-24-72SGD-N



Easy to Clean Air Filter Front Access



TBB-24-48SBD-N6

■ Side mount compressor unit

With compressors positioned on the side of the unit, our refrigerators can now be serviced without being moved. Our innovative, front breathing feature also allows this model to be highly efficient in narrow spaces.

■ Refrigerator holds 33°F ~ 38°F for optimal beverage preservation

■ Standard features

- Anti-corrosion coated evaporator
- Self-contained system
- 4" dia. swivel casters standard
- Door locks standard

■ Optional features

- 2" dia. casters available
- 6" height adjustable legs available

TBB MODELS SPECIFICATIONS

ELECTRICAL DATA	TBB-24-48SGD-N/SBD-N6	TBB-24-60SGD-N/SBD-N6	TBB-24-72SGD-N/SBD-N6
Voltage	115/60/1	115/60/1	115/60/1
Plug Type	Ⓜ NEMA 5-15P	Ⓜ NEMA 5-15P	Ⓜ NEMA 5-15P
Full Load Amp.	2.6(SGD) / 1.8(SBD)	2.9(SGD) / 2.0(SBD)	2.9(SGD) / 2.0(SBD)
Compressor HP	1/3(SGD) / 1/5(SBD)	1/3(SGD) / 1/5(SBD)	1/3(SGD) / 1/5(SBD)
Refrigerant	R-290(SGD) / R-600a(SBD)	R-290(SGD) / R-600a(SBD)	R-290(SGD) / R-600a(SBD)
Cord Length (ft.)	8.5	8.5	8.5
Lamp (w)	7.5	9	9
DIMENSIONAL DATA			
Capacity (1/2 Barrels)	-	2	3
Capacity (cu.ft.)	12.2	16.46	20.62
Ext. Dimension (L x D x H) (in.)	49 1/8 x 24 1/2 x 35 3/8†	61 1/8 x 24 1/2 x 35 3/8†	73 1/8 x 24 1/2 x 35 3/8†
# of Swing Door	2	2	3
# of Shelves (Size (L x D) (in.))	4 (16 3/4 x 18)	4 (22 7/8 x 18)	6 (18 1/2 x 18 (L/R), 20 1/4 x 18 (M))
# of Casters	5	6	6
Net Weight (lbs.)	231(SGD) / 220(SBD)	265(SGD) / 236(SBD)	295(SGD) / 276(SBD)
Gross Weight (lbs.)	264(SGD) / 253(SBD)	307(SGD) / 279(SBD)	339(SGD) / 333(SBD)

Design and specifications subject to change without notice. Most updated spec sheets are available at www.turboairinc.com.

Actual shipping weight may differ due to extra packing materials for product protection.


* Depth does not include 2"(SGD) / 1-3/8"(SBD) for door handles. Depth does not include 2" for rear spacers. † Height does not include 5" for caster height.

■ WARRANTY: 3 Year Parts and Labor Warranty, Additional 4 Year Warranty on Compressor



Elevate your expectations with Turbo Air

We fulfill your every need and beyond
with a wide selection of 1200+ refrigeration units.

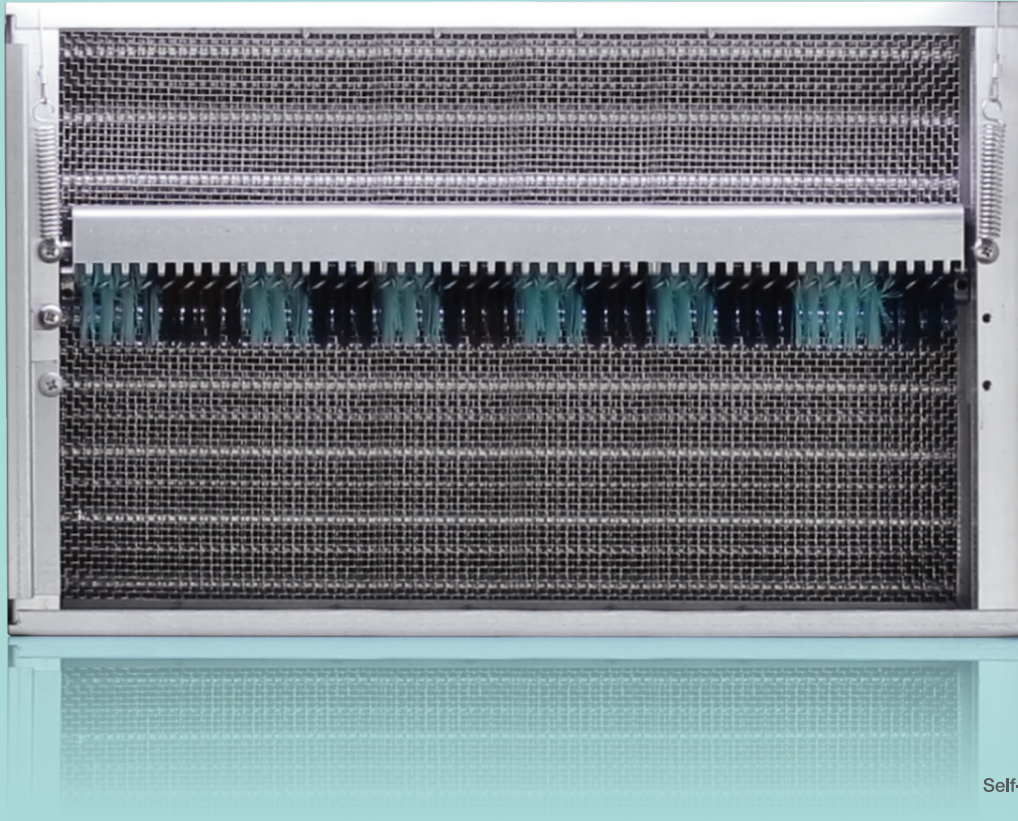

Let's Watch Turbo Air's
Self-Cleaning Condenser Video!

Patented, Maintenance free Self-Cleaning Condenser only at Turbo Air

The 'Self-Cleaning Condenser' cleans the condenser with a rotating brush that moves up and down 2-3 times a day, preventing any dust build-up and maintaining the highest efficiency while saving additional energy.

www.turboairinc.com



Refrigeration Reinvented **Turbo air** REFRIGERATOR MANUFACTURER

Toll Free: 800-627-0032 Warranty Service: 800-381-7770

Texaking: 214-723-7200 German Knife: 800-500-3519 Refrigeration System: 888-900-1002