

| | |
|-------------------|--------|
| Project: | |
| Model #: | |
| Item #: | |
| Available W/H: | Qty: |
| Approval: | |
| AIA #: | SIS #: |
| CSI Section 11400 | |

Roll-In Solid Door Refrigerator - with shelves Reach-In Top Mount PRO Series

FEATURES & BENEFITS

Model : PRO-50R-RI-N-SH

Self-Cleaning Condenser

The accumulation of dust in the condenser can cause the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products inside. The Self-Cleaning Condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

Digital temperature control & monitor system

- Keeps food products safe by maintaining constant temperatures
- Alarms that sound when doors are not sealed shut; protect against food spoilage that originates from cold air leaks
- Early warning alarm program detects issues before malfunction occurs
- Digital display allows for easy monitoring
- Programs interpret the condition of refrigeration systems by self-diagnosis
- Rapid cool-down function (Turbo Cooling)
- Automatic evaporator fan motor delays
- Sensitive touch display



Stainless steel shelf holds up to 350 lbs.

Hydrocarbon refrigerants (R-290)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

Cold air distribution system

Provides uniformly maintained temperature within the food zone.

Hot gas condensate system

Through Turbo Air's creative innovation, the condensate system surfaces have been specially treated to resist corrosion. This not only increases efficiency without the risk of refrigerant leakage from corrosion, but also prevents the overflow of condensate water.

All stainless steel cabinet construction

The PRO series model boasts a stainless steel interior and a 22 gauge stainless steel exterior (galvanized steel top, bottom). It guarantees the utmost in cleanliness and long product life. The PRO series model adds a touch of style to the most refined setting.

Sturdy, clean stainless steel shelving

Shelves are the most important part of cleanliness as they come in direct contact with food. After a while, PVC coated wire shelves may peel, rust and lead to unsanitary conditions. Only the Turbo Air PRO series uniquely provides stainless steel shelving.

High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

USB temperature data storage

Plug in a USB flash drive into the built-in USB port to store raw temperature data while the unit is operating. Raw data can be processed via Turbo Air's website, which plots it on a convenient date and time versus temperature graph. Owners can analyze their unit's performance to ensure stable temperatures during peak usage and detect any temperature anomalies.



Patented Self-Cleaning Condenser



This product is equipped with a fine mesh filter to the front of the condenser to catch dust, and a rotating brush that moves up and down daily to remove excess buildup outward and away.

LED interior lighting

Thermostatic expansion valve

Built to maintain NSF standard temperatures in 100°F ambient

Refrigerator holds 33°F ~ 38°F for the best in food preservation

Lifetime guaranteed heavy duty hinges and handles




| Model | Swing Door | CU./FT. | #of Rack Accepted | #of Shelves | HP | AMPS | Crated Weight (lbs.) | L x D x H [†] (inches) |
|-----------------|------------|---------|-------------------|-------------|----|------|----------------------|---------------------------------|
| PRO-50R-RI-N-SH | 2 | 81.87 | 2 | 8 | 1 | 8 | 820 | 667/8 x 373/4 x 841/4 |

Roll-In Solid Door Refrigerator -with shelves

Reach-In Top Mount
PRO Series

Model : PRO-50R-RI-N-SH

| ELECTRICAL DATA | |
|-----------------------------|--|
| Voltage | 115/60/1 |
| Plug Type |  NEMA 5-15P |
| Full Load Amperes | 8.0 |
| Compressor HP | 1 |
| Cord Length (ft.) | 9 |
| Refrigerant | R-290 |
| DIMENSIONAL DATA | |
| # of Doors | 2 |
| # of Racks Accepted | 2 |
| Net Capacity (cu. ft.) | 81.87 |
| Ext. Length Overall (in.) | 667/8 (1700mm) |
| Ext. Depth Overall (in.)* | 373/4 (960mm) |
| Ext. Height Overall (in.) | 841/4 (2140mm) |
| Int. Length Overall (in.) | 62 (1575mm) |
| Int. Depth Overall (in.) | 313/8 (800mm) |
| Int. Height Overall (in.) | 667/8 (1699mm) |
| # of Shelves | 8 |
| Shelf Size (L x D) (in.) | 303/8 x 303/8 |
| Rack Size (L x D x H) (in.) | 27 x 29 x 66 |
| Net Weight (lbs.) | 726 |
| Gross Weight (lbs.) | 820 |

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 1-1/4" for door handles. Depth does not include 5-1/2" for ramp.

■ **WARRANTY :** 3 Year Parts and Labor Warranty
Additional 4 Year Warranty on Compressor


■ STANDARD FEATURES

- Anti-corrosion coated evaporator
- Door locks
- Self-contained system
- Solid and sturdy grille design
- Heavy duty stainless steel ramp
- Top mount compressor
- Stainless steel shelf holds up to 350 lbs.


** Lead time applies. Please contact your sales representative for more details to order.

PLAN VIEW

(unit : inch)

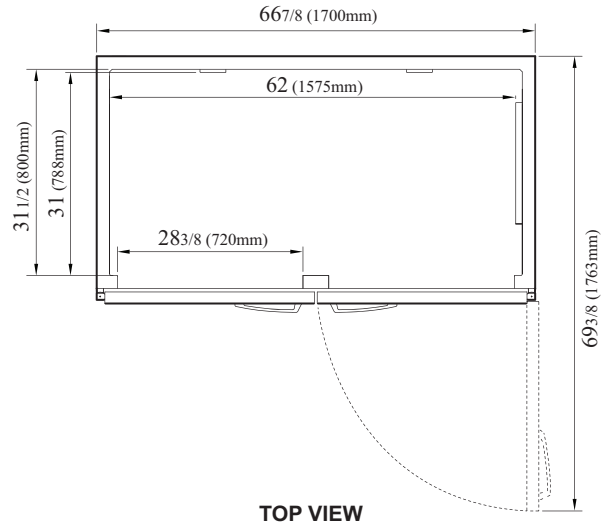

TOP VIEW

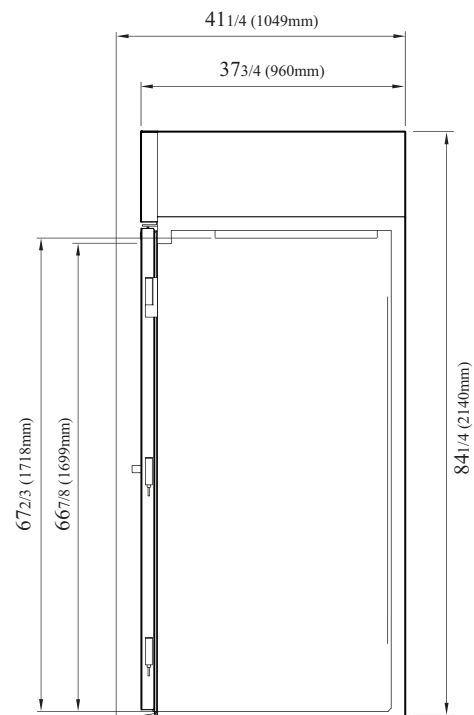

SIDE VIEW

Ver.20221011

NATURAL Refrigerant



MADE IN U.S.A.



- Turbo Air : 800-627-0032
- GK : 800-500-3519
- Warranty : 800-381-7770
- AC : 888-900-1002

Turbo air REFRIGERATOR MANUFACTURER

GERMAN KNIFE

RADIANCE

Turbo air REFRIGERATION SYSTEM

TEXAKING

Continued product development may necessitate specification changes without notice.