

Long Beach, CA 90808 Tel. 310-900-1000 Fax. 310-900-1077 www.turboairinc.com

	Qty:
SIS #:	

Solid Door Heated Cabinet - For Correctional Facility

Reach-In PRO Series

Model: PRO-50H-CRT

___ FEATURES & BENEFITS =__

Digital temperature control & monitor system

- Keeps food products safe by maintaining constant temperatures
- · Alarm beeps when doors are not sealed
- · Early warning alarm program detects issues before malfunction occurs
- · Digital display allows for easy monitoring
- · Sensitive touch display

Ducted fan air distribution system

Maintains temperature within the food zone

On/Off switch

ON/OFF switch is located on control panel

All stainless steel cabinet construction

The PRO series model boasts a stainless steel interior and a 22 gauge stainless steel exterior (galvanized steel top, bottom). It guarantees the utmost in cleanliness and long product life. The PRO series model adds a touch of style to the most refined setting.

Sturdy, clean stainless steel shelving

Shelves are the most important part of cleanliness as they come in direct contact with food. After a while, PVC coated wire shelves may peel, rust and lead to unsanitary conditions. Only the Turbo Air PRO series uniquely provides stainless steel shelving.

■ LED interior lighting

High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

- Full length stainless steel solid doors with locks
- Self-closing doors with stay open feature at 120 degrees

■ Corrections - ready features

Our PRO series CRT units come fully equipped with all the required correctional facilities' features. It includes the stainless steel light cover with security screws, stainless steel PCB cover with security screws, hinges without covers, stainless mesh cover on top, locking hasp (padlock not included), tray slide with security screws and flanged leg.

■ Heated cabinet holds 140°F ~ 180°F for the best in food preservation

Lifetime guaranteed heavy duty hinges and handles











Model	Swing Door	CU./FT.	#of Shelves	Wattage (W)	AMPS	Crated Weight (lbs.)	L x D*x H † (inches)
PRO-50H-CRT	2	47.7	6	3000	15	472	513/4 x 337/8 x 78

(unit: inch)

Model: PRO-50H-CRT

ELECTRICAL DATA					
Voltage	208/115/60/1				
Plug Type	○ NEMA L14-20P				
Full Load Amperes	15				
Wattage (W)	3000				
Cord Length (ft.)	8				
DIMENSIONAL DATA					
# of Doors	2				
# of Racks Accepted	2				
Net Capacity (cu. ft.)	47.7				
Ext. Length Overall (in.)	513/4 (1314mm)				
Ext. Depth Overall (in.)	337/8 (861mm)				
Ext. Height Overall (in.)*	78 (1982mm)				
Int. Length Overall (in.)†	421/4 (1073mm)				
Int. Depth Overall (in.)	275/8 (702mm)				
Int. Height Overall (in.)	583/4 (1493mm)				
# of Shelves	6				
Shelf Size (L x D) (in.)	223/4 x 263/8				
Net Weight (lbs.)	419				
Gross Weight (lbs.)	472				

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

■ WARRANTY: 3 Year Parts and Labor Warranty


STANDARD FEATURES


- Door locks
- · Easy replaceable one piece magnetic door gaskets
- Solid and sturdy grille design
- ** Lead time applies. Please contact your sales representative for more details to order.

OPTIONAL ACCESSORIES

- · Additional stainless steel shelf: (L, R) H50R901700
- Half door bun tray rack: TSP-2224 (each holds up to six 18"L x 26"D sheet pans)
- Full door bun tray rack: TSP-2250 (each holds up to fifteen 18"L x 26"D sheet pans)
- Tray slides kits: TS23-N1LR(#1), TS23-N1LR HALF, TS23-N4LR(#4), TS23-N4LR HALF, TS23-UNLR-H(Universal), TS23-UNLR-H HALF
- (1) Pair of #1 Tray Slides: H26R104460
- (1) Pair of Universal Tray Slides: H26R104470

PLAN VIEW



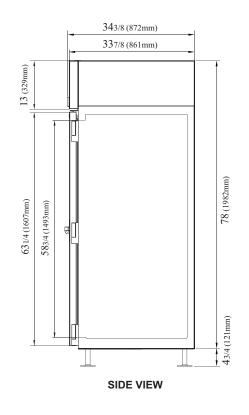

Ver.20230126











■ Turbo Air: 800-627-0032 ■ GK: 800-500-3519

■ Warranty: 800-381-7770 ■ AC: 888-900-1002











^{*} Depth does not include 1-1/4" for door handles.

[†] Height does not include 4-3/4" for leg height.